SAFETY & FIRE PROTECTION SYSTEM LAYOUT

NOTES :

DRAWING REFERENCE	DESCRIPTION	REV	DATE	DESCRIPTION	PREPR'D	CHECK'D	APRV'D	CHECKED	APPROVED
TMBP – SP001 – PS – LAY – D102	SAFETY & FIRE PROTECTION SYSTEM LAYOUT	A	17–12–2025	ISSUED FOR REVIEW	DDS	AS	RTN		

PT. PERTAMINA EP APPROVAL

PROCET :

JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP)
TANJUNG MIRING BARAT & KARANGAN TIMUR

OWNER :

skkmigas PERTAMINA EP

CONTRACTOR :

POG

SCALE : NTS

DRAWING NO. TMBP – SP001 – PS – LAY – D102

SHEET. NO. 01 OF 02

REV A

DRAWING TITLE :

SAFETY & FIRE PROTECTION SYSTEM LAYOUT

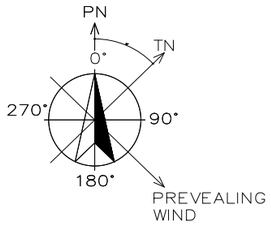

EQUIPMENT LIST			
NO	TAG. NO.	DESCRIPTION	GIRD
1	PN-003	FIRE WATER POND	C2
2	P-050A/B	VERTICAL FIRE WATER PUMP	C2
3	P-051	JOCKEY PUMP	C2
4	Z-009	MANIFOLD CHEMICAL INJECTION	D4
5	PN-001	SUMP PIT	C4
6	P-002A	TEST PUMP TMB	D5
7	P-003A/B	TEST PUMP KRG	D5
8	P-001A/B	GROSS TRANSFER PUMP	C5
9	V-001	PROD. SEPARATOR TMB	E4
10	V-002	PROD. SEPARATOR KRG	E4
11	V-003	TEST SEPARATOR TMB	E4
12	V-004	TEST SEPARATOR KRG	E4
13	V-005	PROD. SCRUBBER	E4
14	–	CONTROL ROOM	E6
15	–	WAREHOUSE & WORKSHOP	C6
16	Z-002	FUEL GAS PACKAGE	E6
17	GEG-001	GAS ENGINE GENERATOR	D6
18	GEG-002	GAS ENGINE GENERATOR	D6
19	DEG-001	DIESEL ENGINE GENERATOR	D6
20	Z-005,V-009,V-010	IA/PA PACKAGE	E7
21	V-006	KNOCK OUT DRUM VESSEL	D6

EQUIPMENT LIST			
NO	TAG. NO.	DESCRIPTION	GIRD
22	V-007	CLOSED DRAIN VESSEL	C6
23	FL-001	FLARE STACK	C9
24	P-016AB,P-017AB,PN-002	SERVICE WATER	D7
25	T-003	TEST TANK TMB	E4
26	T-004	TEST TANK KRG	D4
27	T-006B	STORAGE TANK KRG	C6
28	T-005A	STORAGE TANK TMB	D5
29	T-005B	STORAGE TANK TMB	D5
30	T-006A (EXISTING)	STORAGE TANK KRG (EXISTING)	C5
31	P-006A/B	KOD PUMP	D6
32	P-007A/B	CLOSED DRAIN PUMP	D6
33	P-018	CLOSE DRAIN SUMP PUMP	D6
34	P-019	WATER SUMP PUMP	C4
35	P-016A/B	BOSTER PUMP	E7
36	P-017A/B	WATER DISTRIBUTION PUMP	D7
37	P-021	KOD SUMP PUMP	D6
38	T-019	DIESEL STORAGE TANK	E6
39	T-017	PORTABLE WATER TANK	D7
40	Z-004	WATER TREATMENT PACKAGE	D7
41	PN-002	WATER POND	E7
42	P-008A/B	DEEP WELL PUMP	E4
43	P-023	GROSS SUMP PUMP	C5
44	P-040	STORAGE TANK SUMP PUMP	C5

LEGEND & SYMBOL

NO	SYMBOL	DESCRIPTION	QTY.
1		HYDRANT WITH HOSE BOX (NOTE-1)	10
		HOSE BOX	10
2	FM	FIRE MONITOR (NOTE-1)	2
3	BC	20 LB (9kg) BC DRY CHEMICAL EXTINGUISHER	16
4	ABC	10 LB (4.5kg) ABC DRY CHEMICAL EXTINGUISHER	7
5	CO2	10 LB (4.5 kg) PORTABLE CO2 EXTINGUISHER	5
6	FSS	FIRE SUPRESSIONS SYSTEM (FM-200)	2
7	FAK	FIRST AID KIT	2
8		COMBINED SAFETY SHOWER AND EYEWASH	2
9		WIND SOCK	2
10	LSS	LOCAL FIRE SUPPRESSION SYSTEM	3
11		LIFEBUOY	3
12	EW	PORTABLE EYEWASH	2

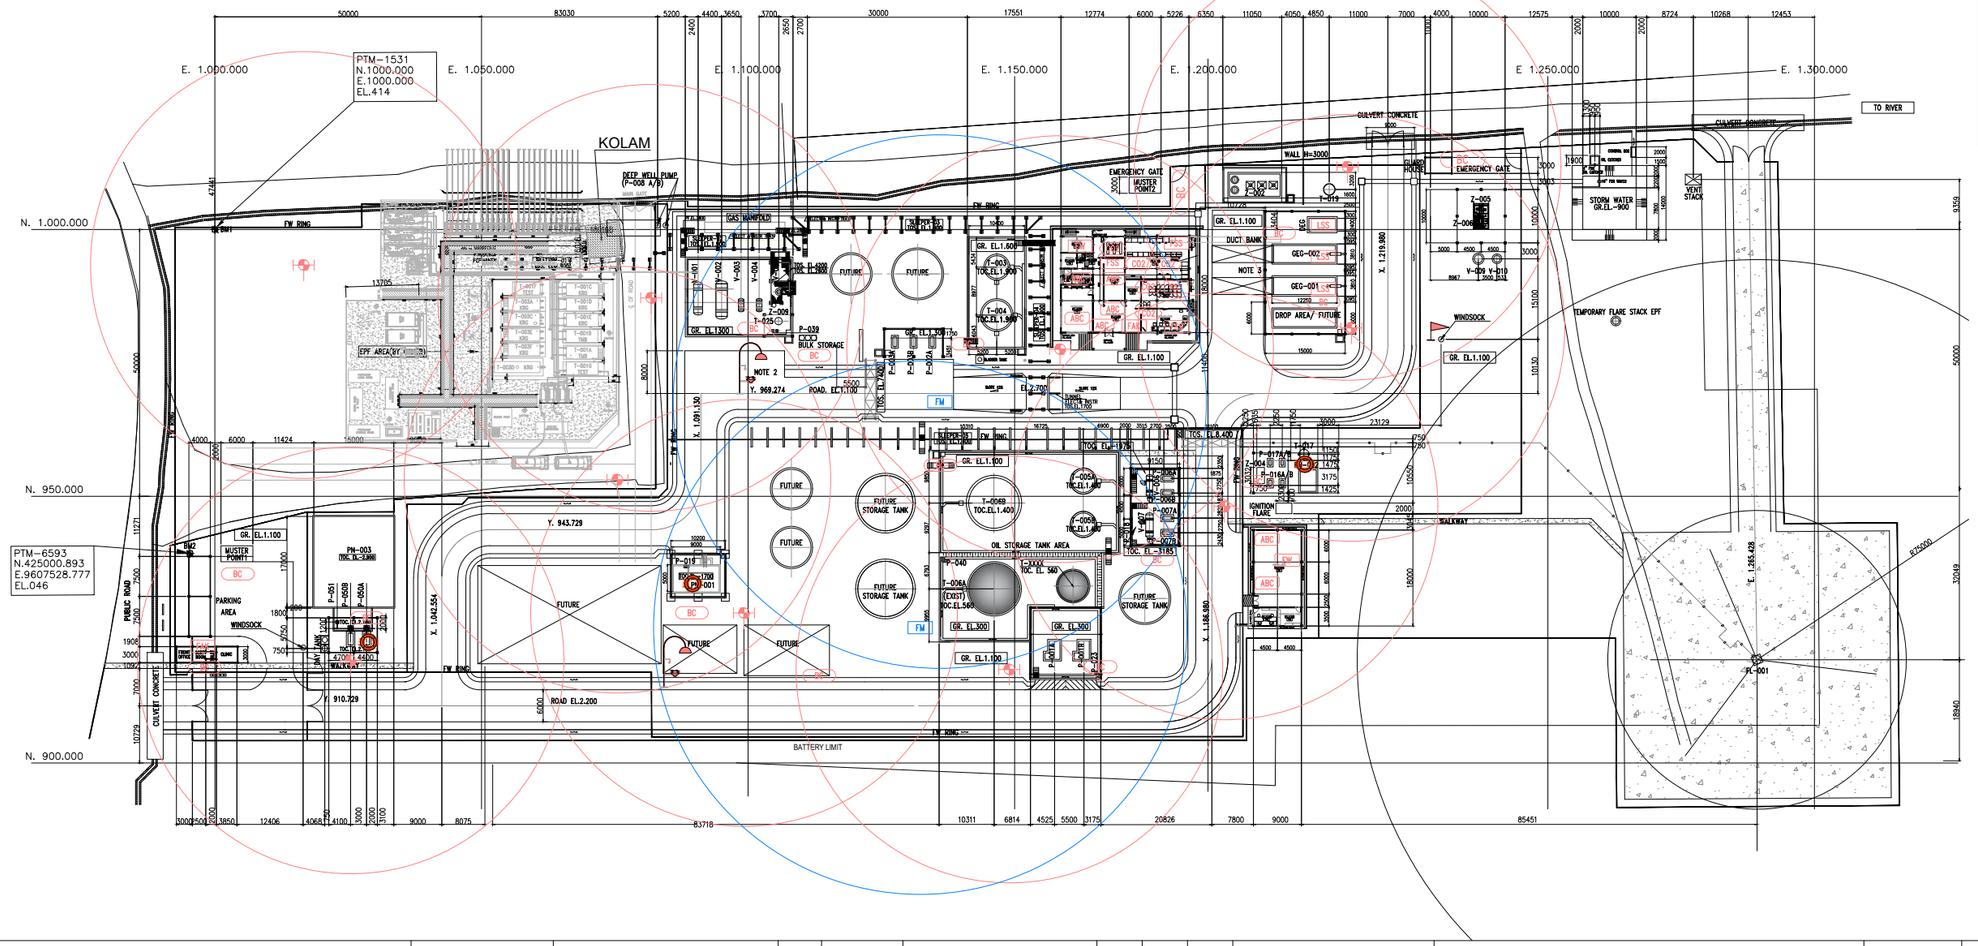

SIMBOL & KETERANGAN :

- BM / Patok Pilar
- Pagar Beton
- Pagar Harmonika
- Bangunan
- Kolam
- Pipa
- Jalan
- Sungai
- Rawa
- Kontur dan Label
- Jalan Existing
- Saluran Drainase

NOTES :

1. HYDRANT COVERAGE AREA IS 40 m.
   FIRE MONITOR COVERAGE AREA IS 50 m.
2. PRELIMINARY LOCATION ONLY, WILL BE UPDATED AS PER LOCATION OF NEW CHEMICAL INJECTION
3. THE DOOR ON THE CCR BUILDING FACING GEG SHALL BE NORMALLY CLOSED.

DRAWING REFERENCE	DESCRIPTION	REV	DATE	DESCRIPTION	PREPR'D	CHECK'D	APRV'D	CHECKED	APPROVED
TMBP – SP001 – PS – LAY – D102	SAFETY & FIRE PROTECTION SYSTEM LAYOUT	A	17-12-2025	ISSUED FOR REVIEW	DDS	AS	RTN		

PT. PERTAMINA EP APPROVAL

PROCET :
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR

OWNER : skkmigas PERTAMINA EP

CONTRACTOR : POG

SCALE :	DRAWING NO.	SHEET. NO.	REV
NTS	TMBP – SP001 – PS – LAY – D102	02 OF 02	A

DRAWING TITLE :
SAFETY & FIRE PROTECTION SYSTEM LAYOUT