FRAMING PLAN, ROOF PLAN , ELEVATION, SECTION & DETAIL OF WTIP SHELTER

TMBP–SP001–CS–FRM–D110

NOTES :

DRAWING REFERENCE	DESCRIPTION	REV	DATE	DESCRIPTION	PREPR'D	CHECK'D	APRV'D	CHECKED	APPROVED
		A	13–01–2026	ISSUED FOR REVIEW	NAS	AS	MR	YR	MRZ/RS

PT. PERTAMINA EP APPROVAL

PROCET :

JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR

OWNER :

skkmigas PERTAMINA EP

CONTRACTOR :

POG

SCALE :	DRAWING NO.	SHEET. NO.	REV
NTS	TMBP–SP001–CS–FRM–D110	1 OF 1	A

DRAWING TITLE :

FRAMING PLAN, ROOF PLAN , ELEVATION, SECTION & DETAIL OF WTIP SHELTER

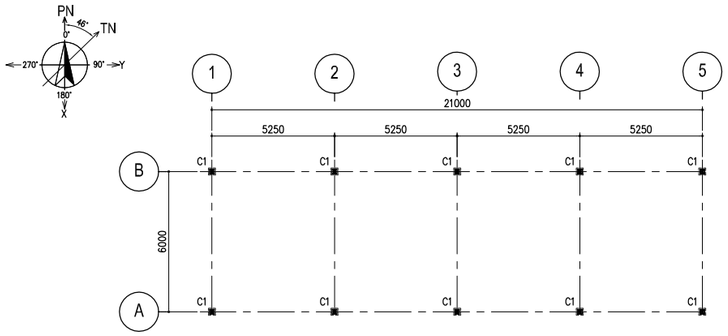

BASE PLATE PLAN EL. +1.500 (B.O.BASE PL)
SCALE 1 : 125

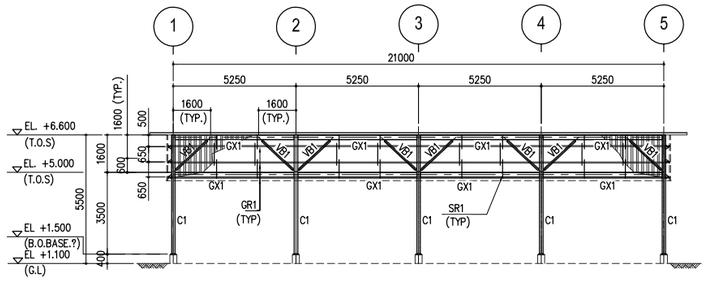

FRAMING ELEVATION LINE A ~ B
SCALE 1 : 125

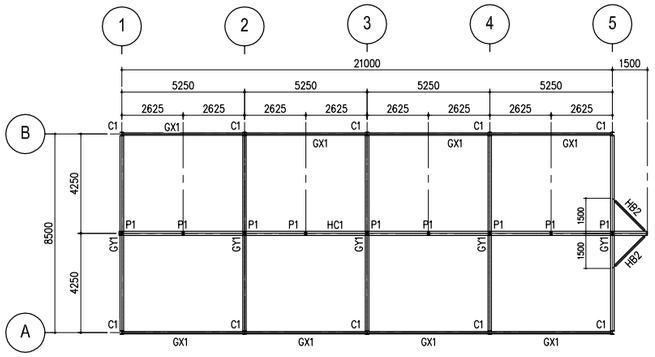

FRAMING PLAN EL. +5.000 (T.O.S)
SCALE 1 : 125

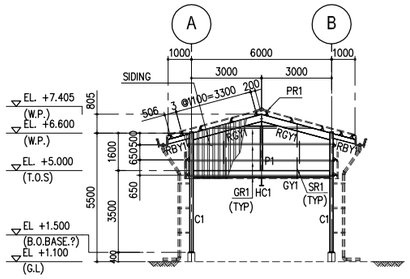

FRAMING ELEVATION LINE 1 & 5
SCALE 1 : 125

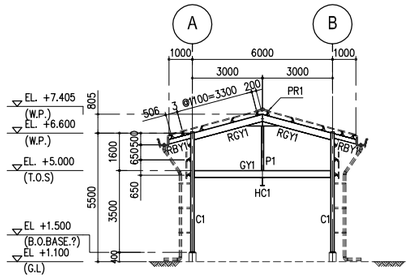

FRAMING ELEVATION LINE 2 ~ 4
SCALE 1 : 125

KEY PLAN

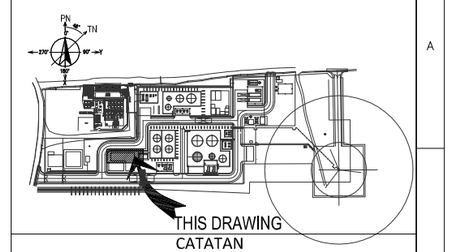

NOTE :

1. ALL DIMENSIONS ARE IN MILLIMETERS, ELEVATION AND COORDINATE ARE IN METERS UNLESS OTHERWISE NOTED.
2. REFERENCE OF ELEVATION AND COORDINATE
   GL. ± 0.000 = MSL+33.75 = EL +1.100
   PE = 1.000.000 : E = 424962.745
   PN = 1.000.000 : N = 9607576.210
3. MATERIAL SPECIFICATION :
   a. STEEL STRUCTURE : ASTM A36 OR JIS 63101 SS400 OR SNI 03–1729–2002 OR EQUIVALENT FY = 2400 KG/CM²
   b. BOLT
      – FOR STRUCTURAL (HIGH STRENGTH BOLT) : ASTM A325 OR JIS B1186 OR EQUIVALENT
      – FOR NON STRUCTURAL (ORDINARY STRENGTH BOLT) : ASTM A307 OR JIS B1180 OR EQUIVALENT
   c. GRATING SHALL BE CONFORM TO THE FOLLOWING :
      MATERIAL : ASTM A36,JIS 3101 SS–400 OR EQUIVALENT.
      : HOT DIP GALVANIZED ASTM A123
      TYPE : SERRATED GRATING TYPE
      HEIGHT : 38 mm
      LOAD BAR THICKNESS : 5 mm
      LOAD BAR PITCH : 30 mm
      CROSS BAR : 6 MM (TWISTED)
      CROSS BAR PITCH : 100 mm
4. WELDING ELECTRODES : AWS–AS.I E70 SERIES OR JIS Z3212 D50 SERIES OR EQUIVALENT
5. THIS SHELTER INCLUDE MANUAL HOIST 3 TON

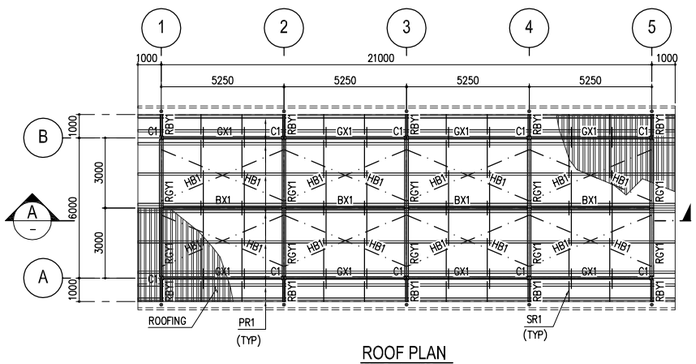

ROOF PLAN
SCALE 1 : 125

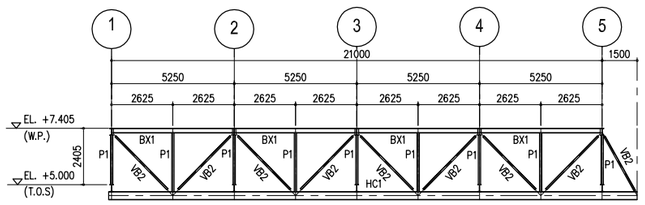

SECTION A
SCALE 1 : 125

MEMBER SCHEDULE

MEMBER	MARK	PROFILE	REMARK
COLUMN	C1	H–150x150x7x10	
POST	P1	H–100x100x6x8	
GIRDER	GY1	H–300x150x6.5x9	
	GX1	H–250x125x6x9	
BEAM	BX1	H–200x100x5.5x8	
	HC1	H–350x175x7x11	
RAFTER	RGY1	H–300x150x6.5x9	
	RBY1	H–200x100x5.5x8	
BRACING	HB1	RB ø16	
	HB2	L–75x75x6	
	VB1	L–75x75x6	
	VB2	2L–75x75x6	
PURLIN	PR1	C–150x65x20x3.2	
GIRT	GR1	C–150x65x20x3.2	
SAGROD	SR1	RB ø12	

NOTES :

1. BEFORE STARTING CONSTRUCTION, CONTRACTOR SHALL VERIFY ACTUAL FIELD CONDITION AND DETERMINE LOCATION, ELEVATION OF EXISTING GRADING AND OTHER STRUCTURE. THE CONTRACTOR SHALL TAKE NECESSARY MEASURES TO HOLD SAFE AND PREVENT DAMAGE TO ANY EXISTING FACILITIES.

DRAWING REFERENCE	DESCRIPTION	REV	DATE	DESCRIPTION	PREPR'D	CHECK'D	APRV'D
TMBP–SP001–CS–BLD–D111	FOUNDATION PLAN, DETAIL AND SECTION OF WTIP SHELTER						
TMBP–SP001–CS–LAY–D102	OVERALL FOUNDATION LAYOUT				NAS	AS	MR
TMBP–SP001–PI–PLP–D101	OVERALL PLOT PLAN DRAWING	A	13–01–2026	ISSUED FOR REVIEW	NAS	AS	MR

PT. PERTAMINA EP APPROVAL

YR / CHECKED / MRZ/RS / APPROVED

PROCET : JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR

OWNER : skkmigas PERTAMINA EP

CONTRACTOR : POG

SCALE : 1 : 125

DRAWING NO. TMBP–SP001–CS–FRM–D110

SHEET. NO. 1 OF 1

REV A

DRAWING TITLE :

FRAMING PLAN, ROOF PLAN , ELEVATION, SECTION & DETAIL OF WTIP SHELTER