skkmigas PERTAMINA EP	**PERTAMINA EP REGIONAL 1 ZONA 4**	POG

ELECTRICAL EQUIPMENT LIST	No. Dok. : TMBP-SP001-EL-LST-D101 Rev. : A Halaman : 1 dari 14

NAMA PEMILIK PROYEK : **PT PERTAMINA EP**

NAMA PROYEK : **JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR**

LOKASI : **SP TANJUNG MIRING BARAT & KARANGAN TIMUR - FIELD LIMAU**

NO. KONTRAK : **4710002197**

REV.	TGL.	DESKRIPSI	DISIAPKAN	DIPERIKSA	DISETUJUI	DIPERIKSA	DISETUJUI
A	14/01/2026	Issued For Review	FN	AS	MR		
			PT. PROSYMPAC OIL & GAS			PT. PERTAMINA EP	

TABEL REVISI

Rev.	Tanggal	Deskripsi

COMMENT RESPONSE SHEET

No.	Page	Company's Comment	Contractor's Response	Remarks

DAFTAR ISI

TABEL REVISI 2
COMMENT RESPONSE SHEET 3
DAFTAR ISI 4
DAFTAR GAMBAR 5
DAFTAR TABEL 6
1. *GENERAL* 7
1.1 Latar Belakang 7
1.2 Tujuan 9
1.3 Ruang Lingkup 9
1.4 Istilah 9
2. KODE, STANDAR, DAN REFERENSI 9
3. EQUIPMENT LIST 11

DAFTAR GAMBAR

Gambar 1.1 Lokasi Rencana SP Tanjung Miring Barat - Karangan Timur 7
Gambar 1.2 Rencana Pola Operasi Fase 8
Gambar 1.3 Rencana Pola Operasi Fase 8

DAFTAR TABEL

Tabel 1.1 Daftar Istilah 9
Tabel 2.1 Dokumen Proyek 10
Tabel 1.1 *Equipment List* 11

1. *GENERAL*

1.1 Latar Belakang

Struktur Tanjung Miring Barat (TMB) terletak di Kabupaten Muara Enim dan Kota Prabumulih, sekitar 20 kilometer di sebelah tenggara Kota Prabumulih, dengan luas daerah sekitar 8 km². Struktur Karangan (KRG) terletak di Kabupaten Muara Enim dan Kota Prabumulih, sekitar 15 kilometer di sebelah selatan Kota Prabumulih, dengan luas daerah sekitar 45 km².

ID	Easting (Meter)	Northing (Meter)	Elevation (Meter)	Feature Code
PN-1531	424962,745	967376,210	10,414	
PM-8593	425000,093	907528,777	19,046	

Gambar 1.1 Lokasi Rencana SP Tanjung Miring Barat - Karangan Timur

Lapangan Tanjung Miring Barat telah diproduksi sejak tahun 1938 dan terus beroperasi hingga tahun 2003 dengan produksi terakhir dari sumur TMB-11. Sejak dinonaktifkannya lapangan ini, fasilitas produksi yang terdiri dari flowline, stasiun pengumpul, serta jalur pengiriman pipa minyak ke custody transfer (PPP Prabumulih) sudah tidak layak operasi. Apabila akan dilakukan pengembangan lapangan, diperlukan pembangunan fasilitas produksi baru yang dapat menampung produksi hidrokarbon dari lapangan Tanjung Miring Baral serta memprosesnya agar sesuai dengan spesifikasi yang dipersyaratkan di titik serah. Saat ini status SP TMB adalah idle atau tidak beroperasi, sehingga produksi sumuran menggunakan Tank On-Site (TOS) dan dikirim secara gross ke SP-II TMT menggunakan trucking. Dikarenakan tidak adanya line gas ke sumur-sumur struktur TMB, supply Listrik untuk pumping unit menggunakan solar (diesel engine). Lapangan Karangan Timur hanya diproduksikan dari 2 sumur yaitu KRG-9 dan KRG-10 beroperasi mulai tahun 1984, dimana kondisi eksisting jalur pengiriman minyak dari sumur menggunakan trucking. Apabila akan dilakukan pengembangan lapangan, diperlukan pembangunan fasilitas produksi baru yang dapat menampung produksi hidrokarbon dari lapangan Tanjung Miring Barat serta memprosesnya agar sesuai dengan spesifikasi yang dipersyaratkan di titik serah.

Dalam rencana jangka panjang sebagai upaya peningkatan produksi, PT Pertamina EP berencana akan mengembangkan Lapangan Tanjung Miring Barat dan Karangan Timur melalui pengembangan fasilitas produksi dimana rencana kerja pengembangan fasilitas akan dibagi ke dalam dua fase.

Pada fase pertama, produksi dari pengembangan awal TMB -KRG Timur akan dikirimkan menuju fasilitas sewa Early Production Facility (EPF) untuk selanjutnya dikirimkan menuju SP- 1 TLJ melalui trunkline baru. Pada fase ini lingkup fasilitas produksi yang akan dibangun adalah flow/ine dari sumuran, sewa EPF dan trunkline dari EPF sampai dengan SP-1 TLJ.

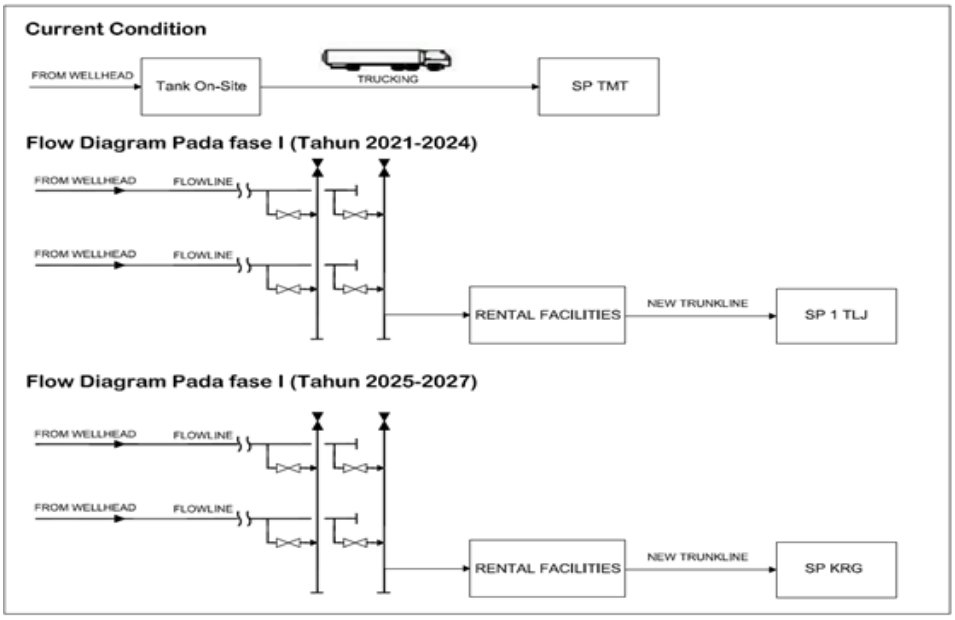

Gambar 1.2 Rencana Pola Operasi Fase

Pada fase kedua, akan dilakukan pengembangan tambahan dari sumur-sumur TMB-KRG Timur. Pada fase ini, lingkup fasilitas produksi yang akan dibangun meliputi pembangunan flowline dari sumuran pengembangan lanjutan serta peningkatan fasilitas SP TMB untuk menggantikan sewa EPF.

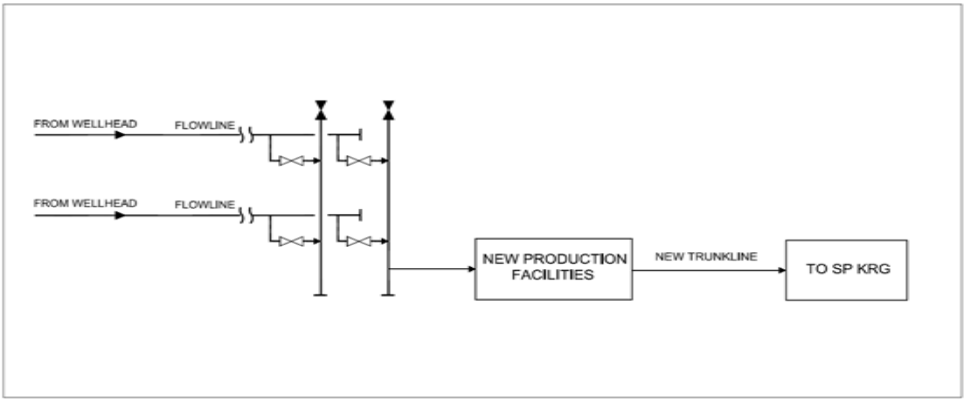

Gambar 1.3 Rencana Pola Operasi Fase

1.2 Tujuan

Dokumen ini dipersiapkan sebagai referensi utama untuk desain, pengadaan, instalasi, hingga operasi dan pemeliharaan peralatan listrik yang harus diikuti oleh KONTRAKTOR dan VENDOR untuk Proyek Pengembangan Fasilitas Produksi Tanjung Miring Barat & Karangan Timur Tahap-01.

1.3 Ruang Lingkup

Ruang lingkup dokumen ini merangkum seluruh peralatan listrik dalam proyek untuk DED PENGEMBANGAN FASILITAS PRODUKSI TANJUNG MIRING BARAT & KARANGAN TIMUR TAHAP-01 di Lapangan Tanjung Miring Barat & Karangan Timur, Indonesia. Dokumen ini berfungsi sebagai referensi utama untuk desain, pengadaan, instalasi, hingga operasi dan pemeliharaan.

1.4 Istilah

Dokumen ini berisi istilah-istilah yang memiliki definisi tercantum sebagai berikut:

Tabel 1.1 Daftar Istilah

Perusahaan	Perusahaan yang dimaksud adalah PT PERTAMINA HULU ROKAN selaku Pemilik dan Pengguna Fasilitas akhir.
Kontraktor	Pihak yang dipilih oleh PERUSAHAAN sebagai pelaksana pekerjaan pengadaan dan konstruksi yang akan bertanggung jawab kepada PERUSAHAAN.
Vendor	Pihak lain yang akan menyediakan sesuatu untuk kebutuhan proyek, selain yang disediakan oleh PERUSAHAAN dan KONTRAKTOR, disebut VENDOR. Tanggung jawabnya langsung kepada KONTRAKTOR baik terhadap PO maupun bentuk perjanjian lain antara VENDOR dan KONTRAKTOR.
SKK MIGAS	Suatu badan dari Pemerintah Indonesia yang bertanggung jawab terhadap proses persetujuan dan izin untuk semua fasilitas di lingkungan minyak dan gas.
Perencana	Pihak yang dipilih oleh PERUSAHAAN sebagai pelaksana pekerjaan Jasa FEED Engineering Services. Dalam hal ini disebut PERENCANA, yang akan bertanggung jawab kepada PERUSAHAAN sebagaimana dirinci dalam kontrak, scope of work, atau work order.
Inspektor	Perwakilan dari PERUSAHAAN dan/atau seseorang yang ditunjuk oleh PERUSAHAAN, yang bertanggung jawab sebagai INSPEKTOR atas pekerjaan yang dilakukan oleh KONTRAKTOR.SINGKATAN

2. KODE, STANDAR, DAN REFERENSI

DOKUMEN PROYEK

Tabel 2.1 Dokumen Proyek

No.	No. Dokumen	Nama Dokumen
1	TMBP-SP001-EL-LAY-D101	*Electrical Equipment Layout*
2	TMBP-SP001-EL-LAY-D111	*Lighting Layout*

3. EQUIPMENT LIST

Tabel 3.1 *Equipment List*

ELECTRICAL EQUIPMENT LIST										
Tag No.	Equipment / Load Description	Dimension (W x D x H) (mm)	Qty (Set)	Unit	Rated (Volt)	Weight	Rating		Reference Document/Drawing	Remarks
							Generator / Motor	Others		
						(kg)	(kW)	(kVA)		
A. ELECTRICAL PANEL ROOM (CONTROL BUILDING)										
GCP-001	GENERATOR CONTROL PANEL FOR GEG-01/ 0.4 kV, 50 Hz, 0.8 PF	800 X 1200 X 2000	1	Set	400/230	1500	-	-	TMBP-SP001-EL-LAY-D101	Free Standing
GCP-002	GENERATOR CONTROL PANEL FOR GEG-02/ 0.4 kV, 50 Hz, 0.8 PF	800 X 1200 X 2000	1	Set	400/230	1500	-	-	TMBP-SP001-EL-LAY-D101	Free Standing
GCP-003	GENERATOR CONTROL PANEL FOR DEG-01/ 0.4 kV, 50 Hz, 0.8 PF	800 X 1200 X 2000	1	Set	400/230	1500	-	-	TMBP-SP001-EL-LAY-D101	Free Standing
MGCP-001	MASTER GENERATOR CONTROL PANEL/ 0.4 Kv, 50 Hz, 0.8 PF	800 X 1200 X 2000	1	Set	400/230	1500	-	-	TMBP-SP001-EL-LAY-D101	Free Standing
SWG/MCC-001	LV SWITCHGEAR 400V, 3Ph, 3W, 50 Hz, 800A, 25kA, 1 Sec INC. 3 CUBICLE, OUT. 5 CUBICLE, TIE 1 CUBICLE	7000 X 1200 X 2200	1	Set	400	2500	-	-	TMBP-SP001-EL-LAY-D101	Free Standing
UPS-001A	230VAC AC UPS 30kVA WITH DISTRIBUTION PANEL	4000 X 800 X 1800	1	Set	400	2000	-	30	TMBP-SP001-EL-LAY-D101	Free Standing
BATT-001	BATTERY BANK A/B, 2X50%, 220 VDC, 75 Ah	2750 X 650 X 1400	2	Set	230	2300	-	-	TMBP-SP001-EL-LAY-D101	Free Standing
-	BATTERY CIRCUIT BREAKER BOX	500 X 300 X 800	1	Set	230	30	-	-	TMBP-SP001-EL-LAY-D101	Free Standing
NLP-001	NORMAL LIGHTING PANEL 15 kVA, 400V, 3 PH, 4W	1200 X 800 X 1100	1	Set	400	200	-	15	TMBP-SP001-EL-LAY-D101	Free Standing
ELP-001	EMERGENCY LIGHTING PANEL 50kVA, 400V, 3 PH, 4W	1200 X 800 X 1100	1	Set	400	200	-	50	TMBP-SP001-EL-LAY-D101	Free Standing
SS-P-005A	PANEL SOFT STARTER FOR GROSS TRANSFER PUMP 90 kW, 400V, 25kA	1500 X 100 X 2300	1	Set	400	300	90	-	TMBP-SP001-EL-LAY-D101	Free Standing
SS-P-005B	PANEL SOFT STARTER FOR GROSS TRANSFER PUMP 90 kW, 400V, 25kA	1500 X 100 X 2300	1	Set	400	300	90	-	TMBP-SP001-EL-LAY-D101	Free Standing

ELECTRICAL EQUIPMENT LIST

Tag No.	Equipment / Load Description	Dimension (W x D x H) (mm)	Qty (Set)	Unit	Rated (Volt)	Weight (kg)	Rating: Generator / Motor (kW)	Rating: Others (kVA)	Reference Document/Drawing	Remarks
	HVAC & EXHAUST FAN									
SAC-01~04 IU	AC SPLIT WALL MOUNTED - ELECT, PANEL ROOM, 2 PK	290 X 1050 X 238	4	Set	230	12	2	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-01~04 OU	CONDENSER UNIT - ELECT, PANEL ROOM	695 X 845 X 300	4	Set	230	36	-	-	-	Wall Mounting
SAC-05 IU	AC SPLIT WALL MOUNTED - ROOM, LOBBY & FRONT OFFICE, 2 PK	290 X 1060 X 238	1	Set	230	12	2	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-05 OU	CONDENSER UNIT - ROOM, LOBBY & FRONT OFFICE	595 X 846 X 300	1	Set	230	36	-	-	-	Wall Mounting
SAC-06 IU	AC SPLIT WALL MOUNTED - INSTRUMENT PANEL ROOM, 1.5 PK	273 X 784 X 195	1	Set	230	8	1	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-06 OU	CONDENSER UNIT - INSTRUMENT PANEL ROOM	550 X 658 X 275	1	Set	230	32	-	-	-	Wall Mounting
SAC-07 ~ 08 IU	AC SPLIT WALL MOUNTED - OPERATOR ROOM, 2 PK	290 X 1050 X 238	2	Set	230	12	2	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-07 ~ 08 OU	CONDENSER UNIT - OPERATOR ROOM	595 X 845 X 300	2	Set	230	36	-	-	-	Wall Mounting
SAC-09 IU	AC SPLIT WALL MOUNTED - DOCUMENT ROOM, 1 PK	273 X 784 X 195	1	Set	230	8	1	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-09 OU	CONDENSER UNIT - DOCUMENT ROOM	418 X 895 X 244	1	Set	230	21	-	-	-	Wall Mounting
SAC-10 IU	AC SPLIT WALL MOUNTED - MANAGER ROOM, 1 PK	273 X 784 X 195	1	Set	230	8	1	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-10 OU	CONDENSER UNIT - MANAGER ROOM	418 X 695 X 244	1	Set	230	21	-	-	-	Wall Mounting
SAC-11 ~ 13 IU	AC SPLIT WALL MOUNTED - MEETING ROOM, 3 PK	290 X 1050 X 238	3	Set	230	12	1	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-11 ~ 13 OU	CONDENSER UNIT- MEETING ROOM	595 X 845 X 300	3	Set	230	38	-	-	-	Wall Mounting
SAC-14 IU	AC SPLIT WALL MOUNTED - LABORATORY, 1 PK	273 X 784 X 195	1	Set	230	8	1	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-14 OU	CONDENSER UNIT - LABORATORY	550 X 858 X 275	1	Set	230	32	-	-	-	Wall Mounting

ELECTRICAL EQUIPMENT LIST

Tag No.	Equipment / Load Description	Dimension (W x D x H) (mm)	Qty (Set)	Unit	Rated (Volt)	Weight (kg)	Rating: Generator / Motor (kW)	Rating: Others (kVA)	Reference Document/Drawing	Remarks
SAC-15 IU	AC SPLIT WALL MOUNTED - MUSHOLLA, 1 PK	273 X 784 X 195	1	Set	230	8	1	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-15 OU	CONDENSER UNIT - MUSHOLLA	418 X 695 X 244	1	Set	230	24	-	-	-	Wall Mounting
SB-EFN-001	EXHAUST AIR FAN (CEILING) - PANTRY	VTA	1	Set	230	VTA	-	-	TMBP-SP001-EL-LAY-D111	Ceiling Mounting
SB-EFN-002	EXHAUST AIR FAN (CEILING) - ABLUTION	VTA	1	Set	230	VTA	-	-	TMBP-SP001-EL-LAY-D111	Ceiling Mounting
SB-EFN-003	EXHAUST AIR FAN (CEILING) - TOILET MALE	VTA	1	Set	230	VTA	-	-	TMBP-SP001-EL-LAY-D111	Ceiling Mounting
SB-EFN-004	EXHAUST AIR FAN (CEILING) - TOILET FEMALE	VTA	1	Set	230	VTA	-	-	TMBP-SP001-EL-LAY-D111	Ceiling Mounting
SB-EFN-005	EXHAUST AIR FAN (WALL) - BATTERY ROOM	VTA	2	Set	230	VTA	-	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
B. SECURITY POST, CLINIC & FRONT OFFICE										
SAC-16 IU	AC SPLIT WALL MOUNTED - CLINIC, 1 PK	273 X 784 X 195	1	Set	230	8	1	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-16 OU	CONDENSER UNIT - CLINIC	418 X 695 X 244	1	Set	230	24	-	-	-	Wall Mounting
SAC-17 IU	AC SPLIT WALL MOUNTED - SECURITY ROOM, 1 PK	273 X 784 X 195	1	Set	230	8	1	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-17 OU	CONDENSER UNIT - SECURITY ROOM	418 X 695 X 244	1	Set	230	24	-	-	-	Wall Mounting
SP-EFN-001	EXHAUST AIR FAN (CEILING) - TOILET 1	VTA	1	Set	230	VTA	-	-	TMBP-SP001-EL-LAY-D111	Ceiling Mounting
SP-EFN-002	EXHAUST AIR FAN (CEILING) - TOILET 2	VTA	1	Set	230	VTA	-	-	TMBP-SP001-EL-LAY-D111	Ceiling Mounting
MCBB-3	MCB BOX 3 (EMERGENCY), 230V, 10A, 50Hz	300 X 400 X 200	1	Set	400/230	50	-	-	TMBP-SP001-EL-LAY-D111	Wall Mounting/ Steel Support
C. INSTRUMENT PART BUILDING										

ELECTRICAL EQUIPMENT LIST

Tag No.	Equipment / Load Description	Dimension (W x D x H) (mm)	Qty (Set)	Unit	Rated (Volt)	Weight (kg)	Rating: Generator / Motor (kW)	Rating: Others (kVA)	Reference Document/Drawing	Remarks
SAC-18 IU	AC SPLIT WALL MOUNTED - ADMIN ROOM, 1 PK	273 X 784 X 195	1	Set	230	8	1	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-18 OU	CONDENSER UNIT - ADMIN ROOM	550 X 658 X 275	1	Set	230	32	-	-	-	Wall Mounting
SAC-19 IU	AC SPLIT WALL MOUNTED - INSTRUMENT PART BUILDING, 1 PK	273 X 784 X 195	1	Set	230	8	1	-	TMBP-SP001-EL-LAY-D111	Wall Mounting
SAC-19 OU	CONDENSER UNIT - INSTRUMENT PART BUILDING	418 X 695 X 244	1	Set	230	24	-	-	-	Wall Mounting
D. GENERAL AREA										
MCBB-1	MCB BOX 1 (NORMAL & EMERGENCY), 400/230 V, 10A, 50Hz (GENERATOR SHELTER)	400 X 500 X 200	1	Set	400/230	50	-	-	TMBP-SP001-EL-LAY-D111	Wall Mounting/ Steel Support
MCBB-2	MCB BOX 2 (NORMAL & EMERGENCY), 400/230 V, 10A & 20A, 50Hz (GTP SHELTER)	400 X 500 X 200	1	Set	400/230	50	-	-	TMBP-SP001-EL-LAY-D111	Wall Mounting/ Steel Support
MCBB-4	MCB BOX 4 (EMERGENCY), 230 V, 10 A, 50 Hz (STREET LIGHTING)	300 X 400 X 200	1	Set	400/230	50	-	-	TMBP-SP001-EL-LAY-D111	Wall Mounting /Steel Support

Note:

1. All items (incl. Dimension and size) shall be updated after receive VENDOR data.

2. All the listed Equipment, Component and related materials in this document shall be uses as reference only.

3. CONTRACTOR shall complete the materials as necessary / required based on related issued documents.