NAMA PEMILIK PROYEK : **PT PERTAMINA EP**

NAMA PROYEK : **JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR**

LOKASI : **SP TANJUNG MIRING BARAT & KARANGAN TIMUR - FIELD LIMAU**

NO. KONTRAK : **4710002197**

REV.	TGL.	DESKRIPSI	DISIAPKAN	DIPERIKSA	DISETUJUI	DIPERIKSA	DISETUJUI
A	13/01/2026	Issued For Review	YP	AS	MR		
			PT. PROSYMPAC OIL & GAS			PT. PERTAMINA EP	

TABEL REVISI

Rev.	Tanggal	Deskripsi

COMMENT RESPONSE SHEET

No.	Page	Company's Comment	Contractor's Response	Remarks

DAFTAR ISI

TABEL REVISI 2
COMMENT RESPONSE SHEET 3
DAFTAR ISI 4
1. PENDAHULUAN 5
1.1 LATAR BELAKANG 5
1.2 Tujuan 7
1.3 Ruang Lingkup 7
1.4 Istilah 7
2. KODE, STANDAR, DAN REFERENSI 8
3. Daftar Singkatan 8

1. PENDAHULUAN

1.1 LATAR BELAKANG

Struktur Tanjung Miring Barat (TMB) terletak di Kabupaten Muara Enim dan Kota Prabumulih, sekitar 20 kilometer di sebelah tenggara Kota Prabumulih, dengan luas daerah sekitar 8 km². Struktur Karangan (KRG) terletak di Kabupaten Muara Enim dan Kota Prabumulih, sekitar 15 kilometer di sebelah selatan Kota Prabumulih, dengan luas daerah sekitar 45 km².

ID	Easting (Meter)	Northing (Meter)	Elevation (Meter)	Feature Code
PN-1531	424962,745	967376,210	10,414	
PM-8593	425000,093	907528,777	19,046	

Gambar 1. Lokasi Rencana SP Tanjung Miring Barat - Karangan Timur

Lapangan Tanjung Miring Barat telah diproduksi sejak tahun 1938 dan terus beroperasi hingga tahun 2003 dengan produksi terakhir dari sumur TMB-11. Sejak dinonaktifkannya lapangan ini, fasilitas produksi yang terdiri dari flowline, stasiun pengumpul, serta jalur pengiriman pipa minyak ke custody transfer (PPP Prabumulih) sudah tidak layak operasi. Apabila akan dilakukan pengembangan lapangan, diperlukan pembangunan fasilitas produksi baru yang dapat menampung produksi hidrokarbon dari lapangan Tanjung Miring Baral serta memprosesnya agar sesuai dengan spesifikasi yang dipersyaratkan di titik serah. Saat ini status SP TMB adalah idle atau tidak beroperasi, sehingga produksi sumuran menggunakan Tank On-Site (TOS) dan dikirim secara gross ke SP-II TMT menggunakan trucking. Dikarenakan tidak adanya line gas ke sumur-sumur struktur TMB, supply Listrik untuk pumping unit menggunakan solar (diesel engine). Lapangan Karangan Timur hanya diproduksikan dari 2 sumur yaitu KRG-9 dan KRG-10 beroperasi mulai tahun 1984, dimana

kondisi eksisting jalur pengiriman minyak dari sumur menggunakan trucking. Apabila akan dilakukan pengembangan lapangan, diperlukan pembangunan fasilitas produksi baru yang dapat menampung produksi hidrokarbon dari lapangan Tanjung Miring Barat serta memprosesnya agar sesuai dengan spesifikasi yang dipersyaratkan di titik serah. Dalam rencana jangka panjang sebagai upaya peningkatan produksi, PT Pertamina EP berencana akan mengembangkan Lapangan Tanjung Miring Barat dan Karangan Timur melalui pengembangan fasilitas produksi dimana rencana kerja pengembangan fasilitas akan dibagi ke dalam dua fase.

Pada fase pertama, produksi dari pengembangan awal TMB-KRG Timur akan dikirimkan menuju fasilitas sewa Early Production Facility (EPF) untuk selanjutnya dikirimkan menuju SP- 1 TLJ melalui trunkline baru. Pada fase ini lingkup fasilitas produksi yang akan dibangun adalah flowline dari sumuran, sewa EPF dan trunkline dari EPF sampai dengan SP-1 TLJ. Kemudian, pada tahun 2025 dilakukan proses alih-kelola struktur Tanjung Miring Barat dari Field Prabumulih ke Field Limau, sehingga produksi dari Fasilitas Sewa Early Production Facility dikirimkan menuju SP KRG.

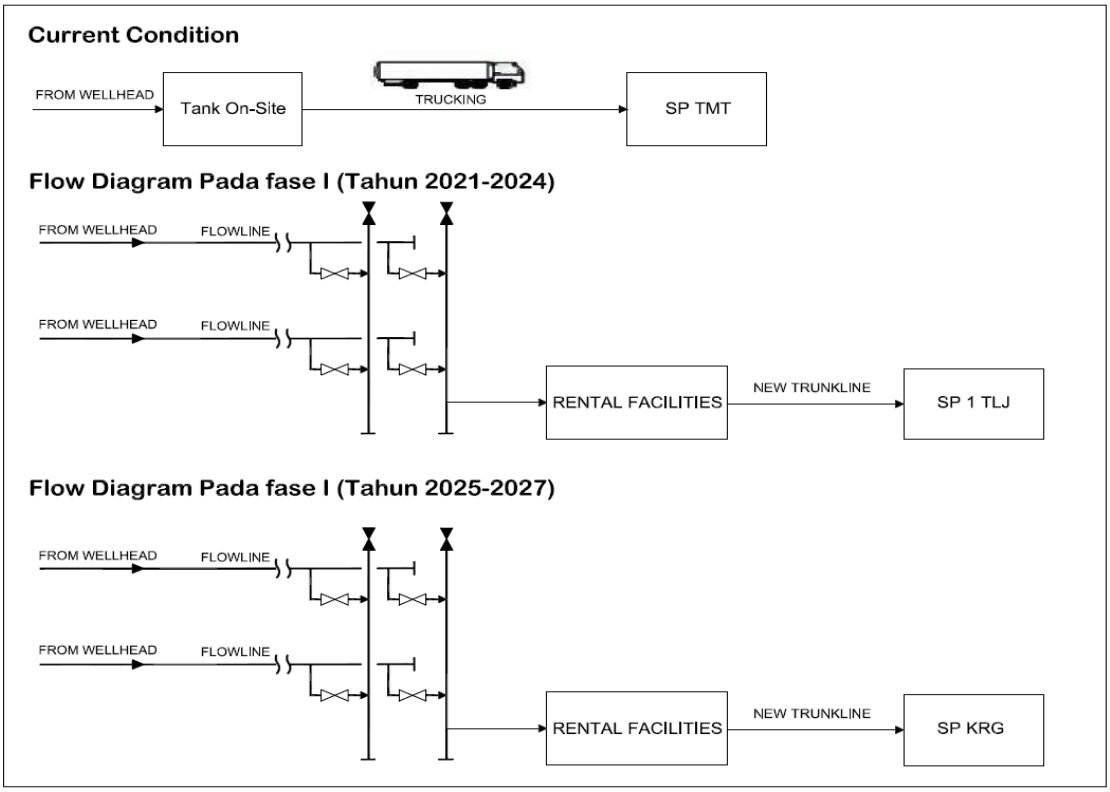

Gambar 2. Rencana Pola Operasi Fase 1

Pada fase kedua, akan dilakukan pengembangan tambahan dari sumur-sumur TMB-KRG Timur. Pada fase ini, lingkup fasilitas produksi yang akan dibangun meliputi pembangunan flowline dari sumuran pengembangan lanjutan serta peningkatan fasilitas SP TMB untuk menggantikan sewa EPF.

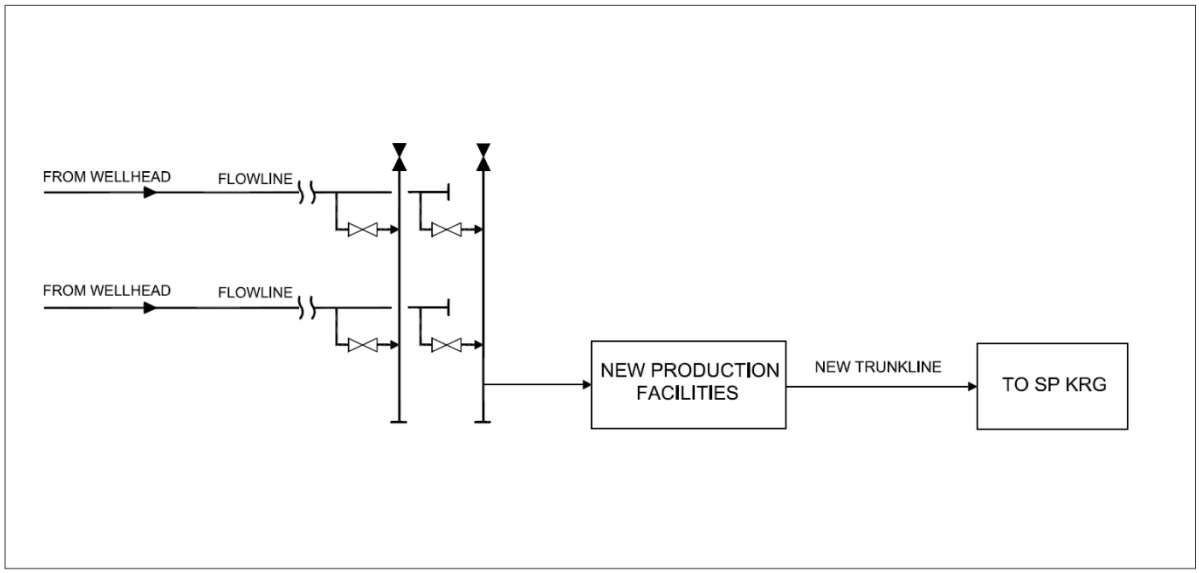

Gambar 3. Rencana Pola Operasi Fase 2

1.2 Tujuan

Dokumen ini menjelaskan dipersiapkan sebagai Mechanical Datasheet for HVAC sebagai bagian dari desain yang harus diikuti oleh KONTRAKTOR dan VENDOR untuk proyek Pembangunan Fasilitas Stasiun Pengumpul Lapangan Tanjung Miring Barat- Karangan Timur, Field Prabumulih.

1.3 Ruang Lingkup

Mechanical Datasheet ini meliputi ketentuan minimal dalam mengatur desain. material,pabrikasi, pemeriksaan, pengujian, persiapan, pengecatan dan persiapan untuk pengiriman HVAC untuk dipasang di proyek Pembangunan Fasilitas Stasiun Pengumpul Lapangan Tanjung Miring Barat — Karangan Timur, Field Prabumulih.

1.4 Istilah

Dokumen ini berisi istilah-istilah yang memiliki definisi tercantum sebagai berikut:

Perusahaan	Perusahaan yang dimaksud adalah PT PERTAMINA HULU ROKAN selaku Pemilik dan Pengguna Fasilitas akhir.
Kontraktor	Pihak yang dipilih oleh PERUSAHAAN sebagai pelaksana pekerjaan

	pengadaan dan konstruksi yang akan bertanggung jawab kepada PERUSAHAAN.
Vendor	Pihak lain yang akan menyediakan sesuatu untuk kebutuhan proyek, selain yang disediakan oleh PERUSAHAAN dan KONTRAKTOR, disebut VENDOR. Tanggung jawabnya langsung kepada KONTRAKTOR baik terhadap PO maupun bentuk perjanjian lain antara VENDOR dan KONTRAKTOR.
SKK MIGAS	Suatu badan dari Pemerintah Indonesia yang bertanggung jawab terhadap proses persetujuan dan izin untuk semua fasilitas di lingkungan minyak dan gas.
Perencana	Pihak yang dipilih oleh PERUSAHAAN sebagai pelaksana pekerjaan Jasa FEED Engineering Services. Dalam hal ini disebut PERENCANA, yang akan bertanggung jawab kepada PERUSAHAAN sebagaimana dirinci dalam kontrak, scope of work, atau work order.
Inspektor	Perwakilan dari PERUSAHAAN dan/atau seseorang yang ditunjuk oleh PERUSAHAAN, yang bertanggung jawab sebagai INSPEKTOR atas pekerjaan yang dilakukan oleh KONTRAKTOR.SINGKATAN

2. KODE, STANDAR, DAN REFERENSI

Dokumen Proyek:

1. TMBP-SP001-ME-DBS-D101 — Mechanical Design Basis
2. TMBP-SP001-ME-SPE-D112 — Specification for HVAC
3. TMBP-SP001-ME-CAL-D101 — Calculation for HVAC

3. Daftar Singkatan

Beberapa singkatan yang paling umum digunakan tercantum dalam daftar berikut:

BOPD	*Barrel Oil Per Day*
BPD	*Barrel Per Day*
BWPD	*Barrel Water Per Day*
EOR	*Enhanced Oil Recovery*
FEED	*Front End Engineering Design*
KRG	*Karangan*
MMSCFD	*Million Standard Cubic Feet per Day*
NPS	*Nominal Pipe Size*

PB	*Production Battery*
PHR	*Pertamina Hulu Rokan*
PT	*Perseroan Terbatas*
SP	*Stasiun Pengumpul*
SCH	*Schedule*
TMB	*Tanjung Miring Barat*
TMT	*Tanjung Miring Timur*
WK	*Wilayah Kerja*

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	1 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Substation Building
Room : Electrical Panel Room

Mode Operation : Continous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	5.2	kWR
Total Supply Air		345	L/s
Application		3 x 100 % + 1 Stand By	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-01~04 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial ●	Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled

Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-01~04 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial ○	Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
● Over Current Prot. ○
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	2 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Substation Building
Room : Lobby & Front Office

Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	5.2	kWR
Total Supply Air		383	L/s
Application		1 x 100 %	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-05 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial	● Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-05 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial	○ Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	3 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Substation Building
Room : Instrument Panel Room

Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	3.35	kWR
Total Supply Air		276	L/s
Application		1 x 100%	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-06 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial ●	Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled

Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-06 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial ○	Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	4 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC) Condensing Unit (CDU)**

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Substation Building
Room : Operator Room
Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	5.2	kWR
Total Supply Air		405	L/s
Application		2 x 100%	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-07~08 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial	● Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-07~08 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial	○ Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	5 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Substation Building
Room : Document Room
Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	1.46	kWR
Total Supply Air		70	L/s
Application		1 x 100%	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-09 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial	● Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-09 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial	○ Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	6 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Substation Building
Room : Manager Room

Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	1.46	kWR
Total Supply Air		102	L/s
Application		1 x 100%	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-10 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial ●	Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-10 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial ○	Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	7 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC) Condensing Unit (CDU)**

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Substation Building
Room : Meeting Room
Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	5.2	kWR
Total Supply Air		370	L/s
Application		3 x 100 %	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-11~13 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial	● Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-11~13 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial	○ Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	8 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Substation Building
Room : Laboratory
Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	3.35	kWR
Total Supply Air		258	L/s
Application		1 x 100 %	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-14 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial ●	Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-14 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial ○	Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	9 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Substation Building
Room : Mushola
Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	2.09	kWR
Total Supply Air		153	L/s
Application		1 x 100%	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-15 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial ●	Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-15 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial ○	Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	10 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Substation Building
Room : Clinic
Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	2.06	kWR
Total Supply Air		196	L/s
Application		1 x 100%	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-16 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial	● Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-16 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial	○ Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	11 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Security Post
Room : Security Post

Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	2.09	kWR
Total Supply Air		158	L/s
Application		1 x 100%	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-17 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial ● Centrifugal		
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-17 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial ○ Centrifugal		
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	12 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Warehouse Building
Room : Admin Room
Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	3.35	kWR
Total Supply Air		253	L/s
Application		1 x 100%	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-18 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial	● Centrifugal	
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-18 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial	○ Centrifugal	
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	13 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Split Wall Mounted (SWAC)**
Condensing Unit (CDU)

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Warehouse Building
Room : Instrument Part Room
Mode Operation : Contionous

DESIGN INFORMATION

Design Condition :

Design Room DB Temp.		23 - 25	°C
Design Relative Humidity		Not Conditioned	%
Total Cooling Load	(*)	2.62	kWR
Total Supply Air		200	L/s
Application		1 x 100%	

Site Condition Data :

Design Outdoor Dry Bulb	35.0	°C
Design Outdoor Humidity	88	%
Min / Max. Ambient Temp	23 / 35	°C
Min / Max. Ambient Hum	80 / 88	%

EQUIPMENT DATA

Power Supply (V/Ph/Hz) 230V - 1Ph - 50Hz
Noise @1m (dBA) (*) Max 55

Unit Type ○ Window ● Split ○ Ceiling Cassete
Refrigerant (*) 410 (non CFC) (Note 7)
Area Classification Safe Area

Indoor Unit

Installation ● Wall Mounted ○ Ceiling Mounted ○ Free Standing

Unit Type		Split Wall Mounted	
Total Unit		4	
Tag Number		SAC-19 IU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Air Filter Type		Washable	
Unit Dimension (LxWxH)		VTA	mm
Location		Indoor	
Unit Weight		12	kg
Temperature Control	(*)	Thermostat	
Fan Type	○ Axial ● Centrifugal		
Fan Motor		Manufacture Standard	
Fan Blade	(*)	Cross Flow	
Fan Power Rated		VTA	kW
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories ○ Reheater ○ Other
Service ● Continuous ○ Intermittent
Spare ○ Yes ● No

Condenser Unit

Type ● Air Cooled ○ Water Cooled
Installation (Vendor Information)

Unit Type		Side Discharge Condenser	
Total Unit		4	
Tag Number		SAC-19 OU	
Manufacturer / Brand	(*)	Daikin or Equal	
Model No.		VTA	
Enclosure		Manufacture Standard	
Unit Dimension (LxWxH)		VTA	mm
Location		Outdoor	
Unit Weight		VTA	kg
Fan Type	● Axial ○ Centrifugal		
Fan Blade	(*)	Direct Driven	
Fan Power Rated		VTA	kW

Compressor (Vendor Information)
○ Hermetic ○ Semi Hermetic

Compressor Power	(*)	1	kW
No of Compressor	(*)	1	
Coil Data			
Tube Material	(*)	Cooper	
Header Material	(*)	Cooper	
Fins Material	(*)	Alumunium	
Casing Material		Manufacture Standard	

Accessories (Vendor Information)
○ High Press. Prot. ● Charging Valve
○ Over Current Prot.
Earthing Bond : VTA

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. All equipment located outdoors chall be coated with industrial coating on coils and housing for extra corrosion protection if equipment is exposed to that type of environment.
2. All Component shall comply with HVAC Specification
3. HVAC Vendor to note that the capacities provided above are indicative and minimums values. HVAC vendor shall carry out his own calculation to confirm the capacities of the equipment provided are able to achieve the HVAC performance required
4. Motor located outdoor and indoor min. IP 56
5. VTA to be complete after purchase order release to sub vendor
6. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	14 of 15

Client	: **PT. PERTAMINA EP**	**P.O No**	: -
Location	: **SP Tanjung Miring**	**RFQ No**	: -
Equ.Name	: **Split Wall Mounted (SWAC) Condensing Unit (CDU)**	**Contractor No**	: -

GENERAL

Building : Substation Building **Area :** Non Hazardous

EQUIPMENT DATA

EXHAUST FANS

Room		PANTRY		Power Available (V/Ph/Hz) :		230V - 1Ph - 50Hz
Manufacturer		VTA		Driver Type		Electric Motor
Model		VTA		Efficiency		VTA %
Type		Ceiling		Hazardous class		Safe Area
Tag No.		SB-EFN-001		Fan Motor Rating :		VTA kW
Quantity		1	unit	Fan Motor Absorber :		VTA kW
Capacity	(*)	75	L/s	Motor Enclosure	(*)	Manufacture Standard
Dimension (LxWxH)		VTA	mm	Actual Noise		VTA
Weight (kg)		VTA	kg	Exhaust Ducting:		N/A
Static Pressure	(*)	VTA	Pa	Anti Spark Design		No
Material				Accessories		○ Automatic Shutter ● Non Return Damper ○ Back-draft Damper ○ Hood
Blade		Alumunium		Installation (Vendor Information)		
Casing		Steel		○ Wall Mounted ● Ceilling Mounted		

Room		ABLUTION		Power Available (V/Ph/Hz) :		230V - 1Ph - 50Hz
Manufacturer		VTA		Driver Type		Electric Motor
Model		VTA		Efficiency		VTA %
Type		Ceiling		Hazardous class		Safe Area
Tag No.		SB-EFN-002		Fan Motor Rating :		VTA kW
Quantity		1	unit	Fan Motor Absorber :		VTA kW
Capacity	(*)	37.5	L/s	Motor Enclosure	(*)	Manufacture Standard
Dimension (LxWxH)		VTA	mm	Actual Noise		VTA
Weight (kg)		VTA	kg	Exhaust Ducting:		N/A
Static Pressure	(*)	VTA	Pa	Anti Spark Design		No
Material				Accessories		○ Automatic Shutter ● Non Return Damper ○ Back-draft Damper ○ Hood
Blade		Alumunium		Installation (Vendor Information)		
Casing		Steel		○ Wall Mounted ● Ceilling Mounted		

Room		TOILET MALE		Power Available (V/Ph/Hz) :		230V - 1Ph - 50Hz
Manufacturer		VTA		Driver Type		Electric Motor
Model		VTA		Efficiency		VTA %
Type		Ceiling		Hazardous class		Safe Area
Tag No.		SB-EFN-003		Fan Motor Rating :		VTA kW
Quantity		1	unit	Fan Motor Absorber :		VTA kW
Capacity	(*)	37.5	L/s	Motor Enclosure	(*)	Manufacture Standard
Dimension (LxWxH)		VTA	mm	Actual Noise		VTA
Weight (kg)		VTA	kg	Exhaust Ducting:		N/A
Static Pressure	(*)	VTA	Pa	Anti Spark Design		No
Material				Accessories		○ Automatic Shutter ● Non Return Damper ○ Back-draft Damper ○ Hood
Blade		Alumunium		Installation (Vendor Information)		
Casing		Steel		○ Wall Mounted ● Ceilling Mounted		

Room		TOILET FEMALE		Power Available (V/Ph/Hz) :		230V - 1Ph - 50Hz
Manufacturer		VTA		Driver Type		Electric Motor
Model		VTA		Efficiency		VTA %
Type		Ceiling		Hazardous class		Safe Area
Tag No.		SB-EFN-004		Fan Motor Rating :		VTA kW
Quantity		1	unit	Fan Motor Absorber :		VTA kW
Capacity	(*)	37.5	L/s	Motor Enclosure	(*)	Manufacture Standard
Dimension (LxWxH)		VTA	mm	Actual Noise		VTA
Weight (kg)		VTA	kg	Exhaust Ducting:		N/A
Static Pressure	(*)	VTA	Pa	Anti Spark Design		No
Material				Accessories		○ Automatic Shutter ● Non Return Damper ○ Back-draft Damper ○ Hood
Blade		Alumunium		Installation (Vendor Information)		
Casing		Steel		○ Wall Mounted ● Ceilling Mounted		

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. Fan Complete with emergency stop push button shall be provide by vendor
2. Exhaust fan located indoor shall be complete with accoustic enclosure if required
3. Motor Located outdoor shall be min IP 55, and Located indoor with air conditioning shall be IP 41 for minimum
4. VTA to be complete after purchase order release to sub vendor
5. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC

MECHANICAL DATASHEET FOR HVAC

Judul Proyek	Nomor Dokumen	Rev	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D121	A	12-Jan-2026	15 of 15

Client : **PT. PERTAMINA EP**
Location : **SP Tanjung Miring**
Equ.Name : **Exhaust / Supply Fan Unit**

P.O No : -
RFQ No : -
Contractor No : -

GENERAL

Building : Security Post

Area : Non Hazardous

EQUIPMENT DATA

EXHAUST FANS

Room		TOILET MALE	
Manufacturer		VTA	
Model		VTA	
Type		Ceiling	
Tag No.		SP-EFN-001	
Quantity		1	unit
Capacity	(*)	37.5	L/s
Dimension (LxWxH)		VTA	mm
Weight (kg)		VTA	kg
Static Pressure	(*)	VTA	Pa
Material			
Blade		Alumunium	
Casing		Steel	

Power Available (V/Ph/Hz) :		230V - 1Ph - 50Hz	
Driver Type		Electric Motor	
Efficiency		VTA	%
Hazardous class		Safe Area	
Fan Motor Rating :		VTA	kW
Fan Motor Absorber :		VTA	kW
Motor Enclosure	(*)	Manufacture Standard	
Actual Noise		VTA	
Exhaust Ducting:		N/A	
Anti Spark Design		No	

Accessories: ○ Automatic Shutter ● Non Return Damper ○ Back-draft Damper ○ Hood

Installation (Vendor Information)
○ Wall Mounted ● Ceilling Mounted

Room		TOILET FEMALE	
Manufacturer		VTA	
Model		VTA	
Type		Ceiling	
Tag No.		SP-EFN-002	
Quantity		1	unit
Capacity	(*)	37.5	L/s
Dimension (LxWxH)		VTA	mm
Weight (kg)		VTA	kg
Static Pressure	(*)	VTA	Pa
Material			
Blade		Alumunium	
Casing		Steel	

Power Available (V/Ph/Hz) :		230V - 1Ph - 50Hz	
Driver Type		Electric Motor	
Efficiency		VTA	%
Hazardous class		Safe Area	
Fan Motor Rating :		VTA	kW
Fan Motor Absorber :		VTA	kW
Motor Enclosure	(*)	Manufacture Standard	
Actual Noise		VTA	
Exhaust Ducting:		N/A	
Anti Spark Design		No	

Accessories: ○ Automatic Shutter ● Non Return Damper ○ Back-draft Damper ○ Hood

Installation (Vendor Information)
○ Wall Mounted ● Ceilling Mounted

REMARKS

(*) Vendor to Confirm
(VTA) Vendor to Advise
1. Fan Complete with emergency stop push button shall be provide by vendor
2. Exhaust fan located indoor shall be complete with accoustic enclosure if required
3. Motor Located outdoor shall be min IP 55, and Located indoor with air conditioning shall be IP 41 for minimum
4. VTA to be complete after purchase order release to sub vendor
5. Ref. Doc TMBP-SP001-ME-SPE-D112 Specification for HVAC & TMBP-SP001-ME-CAL-D101 Calculation for HVAC