NAMA PEMILIK PROYEK : **PT PERTAMINA EP**

NAMA PROYEK : **JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR**

LOKASI : **SP TANJUNG MIRING BARAT & KARANGAN TIMUR - FIELD LIMAU**

NO. KONTRAK : **4710002197**

REV.	TGL.	DESKRIPSI	DISIAPKAN	DIPERIKSA	DISETUJUI	DIPERIKSA	DISETUJUI
A	13/01/2026	Issued For Review	HAR	AS	MR		
			PT. PROSYMPAC OIL & GAS			PT. PERTAMINA EP	

TABEL REVISI

Rev.	Tanggal	Deskripsi

COMMENT RESPONSE SHEET

No.	Page	Company's Comment	Contractor's Response	Remarks

DAFTAR ISI

TABEL REVISI 2
COMMENT RESPONSE SHEET 3
DAFTAR ISI 4
1. PENDAHULUAN 5
1.1 LATAR BELAKANG 5
1.2 Tujuan 7
1.3 Ruang Lingkup 7
1.4 Istilah 7
2. KODE, STANDAR, DAN REFERENSI 8
3. Daftar Singkatan 8

1. PENDAHULUAN

1.1 LATAR BELAKANG

Struktur Tanjung Miring Barat (TMB) terletak di Kabupaten Muara Enim dan Kota Prabumulih, sekitar 20 kilometer di sebelah tenggara Kota Prabumulih, dengan luas daerah sekitar 8 km². Struktur Karangan (KRG) terletak di Kabupaten Muara Enim dan Kota Prabumulih, sekitar 15 kilometer di sebelah selatan Kota Prabumulih, dengan luas daerah sekitar 45 km².

ID	Easting (Meter)	Northing (Meter)	Elevation (Meter)	Feature Code
PN-1531	424962,745	96 7376,210	10,414	
PM-8593	425000,093	907528,777	19,046	

Gambar 1. Lokasi Rencana SP Tanjung Miring Barat - Karangan Timur

Lapangan Tanjung Miring Barat telah diproduksi sejak tahun 1938 dan terus beroperasi hingga tahun 2003 dengan produksi terakhir dari sumur TMB-11. Sejak dinonaktifkannya lapangan ini, fasilitas produksi yang terdiri dari flowline, stasiun pengumpul, serta jalur pengiriman pipa minyak ke custody transfer (PPP Prabumulih) sudah tidak layak operasi. Apabila akan dilakukan pengembangan lapangan, diperlukan pembangunan fasilitas produksi baru yang dapat menampung produksi hidrokarbon dari lapangan Tanjung Miring Baral serta memprosesnya agar sesuai dengan spesifikasi yang dipersyaratkan di titik serah. Saat ini status SP TMB adalah idle atau tidak beroperasi, sehingga produksi sumuran menggunakan Tank On-Site (TOS) dan dikirim secara gross ke SP-II TMT menggunakan trucking. Dikarenakan tidak adanya line gas ke sumur-sumur struktur TMB, supply Listrik untuk pumping unit menggunakan solar (diesel engine). Lapangan Karangan Timur hanya diproduksikan dari 2 sumur yaitu KRG-9 dan KRG-10 beroperasi mulai tahun 1984, dimana

kondisi eksisting jalur pengiriman minyak dari sumur menggunakan trucking. Apabila akan dilakukan pengembangan lapangan, diperlukan pembangunan fasilitas produksi baru yang dapat menampung produksi hidrokarbon dari lapangan Tanjung Miring Barat serta memprosesnya agar sesuai dengan spesifikasi yang dipersyaratkan di titik serah. Dalam rencana jangka panjang sebagai upaya peningkatan produksi, PT Pertamina EP berencana akan mengembangkan Lapangan Tanjung Miring Barat dan Karangan Timur melalui pengembangan fasilitas produksi dimana rencana kerja pengembangan fasilitas akan dibagi ke dalam dua fase.

Pada fase pertama, produksi dari pengembangan awal TMB-KRG Timur akan dikirimkan menuju fasilitas sewa Early Production Facility (EPF) untuk selanjutnya dikirimkan menuju SP- 1 TLJ melalui trunkline baru. Pada fase ini lingkup fasilitas produksi yang akan dibangun adalah flowline dari sumuran, sewa EPF dan trunkline dari EPF sampai dengan SP-1 TLJ. Kemudian, pada tahun 2025 dilakukan proses alih-kelola struktur Tanjung Miring Barat dari Field Prabumulih ke Field Limau, sehingga produksi dari Fasilitas Sewa Early Production Facility dikirimkan menuju SP KRG.

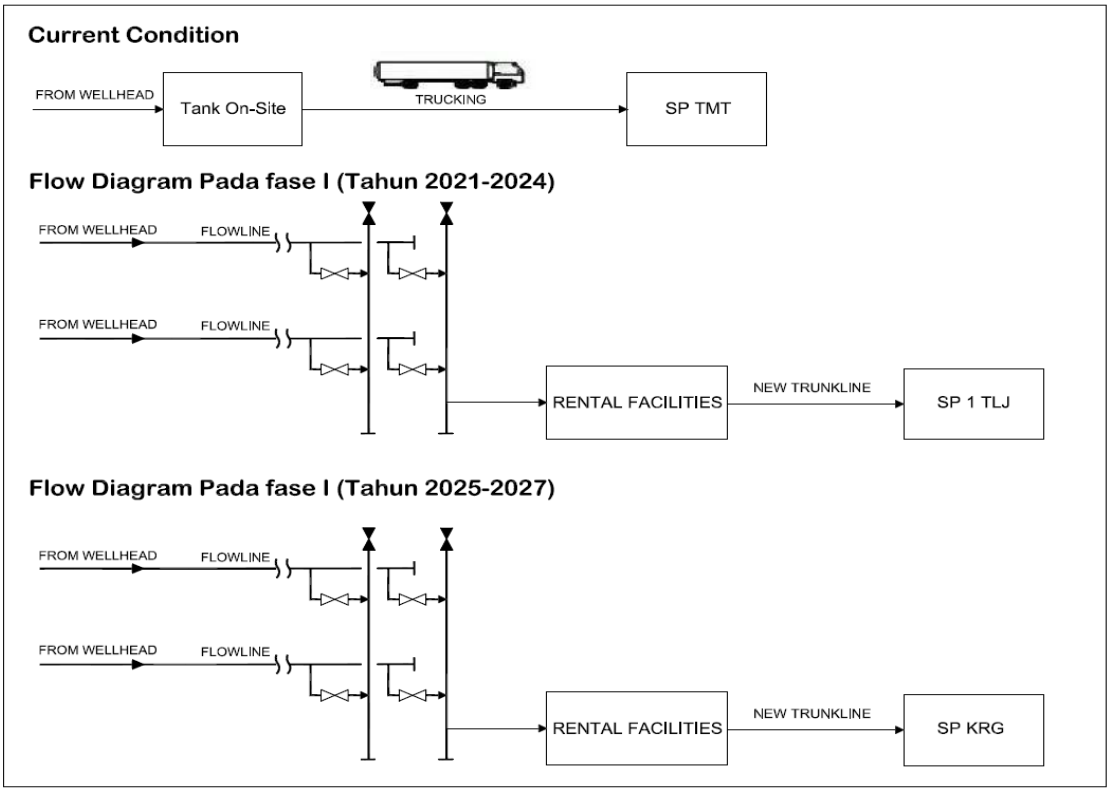

Gambar 2. Rencana Pola Operasi Fase 1

Pada fase kedua, akan dilakukan pengembangan tambahan dari sumur-sumur TMB-KRG Timur. Pada fase ini, lingkup fasilitas produksi yang akan dibangun meliputi pembangunan flowline dari sumuran pengembangan lanjutan serta peningkatan fasilitas SP TMB untuk menggantikan sewa EPF.

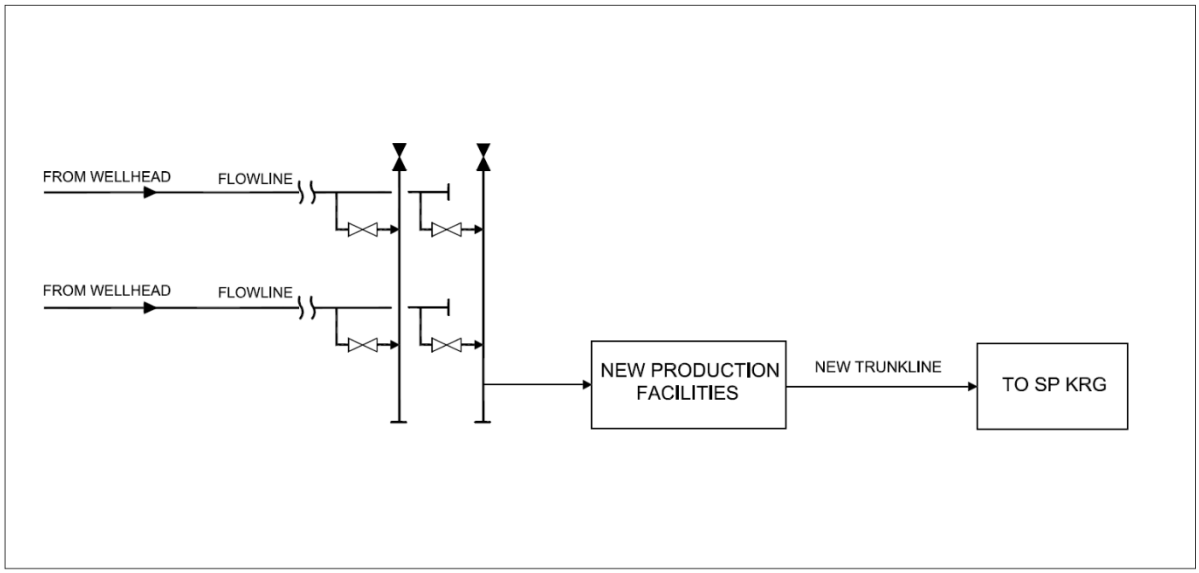

Gambar 3. Rencana Pola Operasi Fase 2

1.2 Tujuan

Dokumen ini menjelaskan dipersiapkan sebagai Mechanical Datasheet for OHC & Electrical Chain Hoist sebagai bagian dari desain yang harus diikuti oleh KONTRAKTOR dan VENDOR untuk proyek Pembangunan Fasilitas Stasiun Pengumpul Lapangan Tanjung Miring Barat-Karangan Timur, Field Prabumulih.

1.3 Ruang Lingkup

Mechanical Datasheet ini meliputi ketentuan minimal dalam mengatur desain. material,pabrikasi, pemeriksaan, pengujian, persiapan, pengecatan dan persiapan untuk pengiriman for OHC & Electrical Chain Hoist untuk dipasang di proyek Pembangunan Fasilitas Stasiun Pengumpul Lapangan Tanjung Miring Barat — Karangan Timur, Field Prabumulih.

1.4 Istilah

Dokumen ini berisi istilah-istilah yang memiliki definisi tercantum sebagai berikut:

Perusahaan	Perusahaan yang dimaksud adalah PT PERTAMINA HULU ROKAN selaku Pemilik dan Pengguna Fasilitas akhir.
Kontraktor	Pihak yang dipilih oleh PERUSAHAAN sebagai pelaksana pekerjaan

	pengadaan dan konstruksi yang akan bertanggung jawab kepada PERUSAHAAN.
Vendor	Pihak lain yang akan menyediakan sesuatu untuk kebutuhan proyek, selain yang disediakan oleh PERUSAHAAN dan KONTRAKTOR, disebut VENDOR. Tanggung jawabnya langsung kepada KONTRAKTOR baik terhadap PO maupun bentuk perjanjian lain antara VENDOR dan KONTRAKTOR.
SKK MIGAS	Suatu badan dari Pemerintah Indonesia yang bertanggung jawab terhadap proses persetujuan dan izin untuk semua fasilitas di lingkungan minyak dan gas.
Perencana	Pihak yang dipilih oleh PERUSAHAAN sebagai pelaksana pekerjaan Jasa FEED Engineering Services. Dalam hal ini disebut PERENCANA, yang akan bertanggung jawab kepada PERUSAHAAN sebagaimana dirinci dalam kontrak, scope of work, atau work order.
Inspektor	Perwakilan dari PERUSAHAAN dan/atau seseorang yang ditunjuk oleh PERUSAHAAN, yang bertanggung jawab sebagai INSPEKTOR atas pekerjaan yang dilakukan oleh KONTRAKTOR.SINGKATAN

2. KODE, STANDAR, DAN REFERENSI

Dokumen Proyek:

1. TMBP-SP001-ME-DBS-D101 — Mechanical Design Basis
2. TMBP-SP001-PI-SPE-D503 — Piping Painting & Lettering Specification
3. TMBP-01-ME-SPE-506 — Specification – OHC & Electrical Chain Hoist
4. TMBP-01-EL-SPE-502 — Specification for Induction Motor

3. Daftar Singkatan

Beberapa singkatan yang paling umum digunakan tercantum dalam daftar berikut:

BOPD	*Barrel Oil Per Day*
BPD	*Barrel Per Day*
BWPD	*Barrel Water Per Day*
EOR	*Enhanced Oil Recovery*
FEED	*Front End Engineering Design*
KRG	*Karangan*
MMSCFD	*Million Standard Cubic Feet per Day*

NPS	*Nominal Pipe Size*
PB	*Production Battery*
PHR	*Pertamina Hulu Rokan*
PT	*Perseroan Terbatas*
SP	*Stasiun Pengumpul*
SCH	*Schedule*
TMB	*Tanjung Miring Barat*
TMT	*Tanjung Miring Timur*
WK	*Wilayah Kerja*

MECHANICAL DATASHEET FOR OHC & ELECTRICAL CHAIN HOIST

Project Name	Doc. No.	Rev.	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D124	A	8-Jan-26	10 OF 19

Facility Name	: **Fasilitas Produksi Stasiun Pengumpul (SP) TMB & KRG**	**Purchase Order No.** :	**TBA**
Location	: **Prabumulih, Indonesia**	**Requisition No.** :	**TBA**
Item Name	: **Overhead Crane GEG Shelter**		
Item No.	: **TBA**		
No. of Unit	: **1**		

DESIGN CONDITIONS

USE:
- ● MAINTENANCE ○ WAREHOUSE
- ○ OPERATION ○ OTHER :

EQUIPMENT DATA :

		MAIN HOOK	AUX. HOOK
CAPACITY [kg]	:	**20000**	N/A
LIFT [mm]	:	**8400**	N/A
SPAN [mm]	:	**15000**	N/A
TRAVERSING DISTANCE [mm]	:	**9000**	N/A
TRAVELING DISTANCE [meter]	:	**23**	N/A
OPERATING HOURS [HR/DAY]	:		

AMBIENT TEMPERATURE [^{0}C] MIN : **24,7** MAX. : **30,3**

RELATIVE HUMIDITY [%] MIN : **80,0** MAX. : **88,0**

DESIGN TEMPERATURE [^{0}C] :

CODE & STANDARD :
- ☐ CMAA ☐ JIS ☐ DIN ☐ BS
- ■ OTHER : ASME B30.10 / ASME B30.15 / ASME B30.17

OPERATING METHOD :

HOISTING :
- ☐ MANUAL ■ PENDANT
- ☐ CABIN ☐ OTHER :

TRAVERSING :
- ☐ MANUAL ■ PENDANT
- ☐ CABIN ☐ OTHER :

TRAVELING :
- ■ PENDANT ☐ OTHER :

LOCATION OF CONTROL :
- ☐ END OF CRANE ☐ CENTER
- ■ OTHER : On the trolley and on the bridge

MATERIAL HANDLED : Gas Engine Generator

BUILDING INFORMATION

COLUMN CENTER SPAN [mm]	:	**15000**
RAIL SPAN [mm]	:	**14000**
LONGITUDINAL LENGTH [mm]	:	**23000**
CLEARANCE BETWEEN RAILS & EAVES [mm]	:	**Min. 1500**
RAIL SPECIFICATION	:	**RAIL SQUARE BAR**
ALLOWABLE WHEEL LOAD [KG]	:	**(*)**

ELECTRICAL AREA CLASSIFICATION (IEC)
- ● CLASS **1** ZONE **2** ○ NON HAZARDOUS
- GAS GROUP: **2A** DIV **2**
- TEMP. CLASS:

CONSTRUCTION FEATURES

TYPE :
- ● OVERHEAD [☐ SINGLE GIRDER ■ DOUBLE GIRDER]
- ○ SUSPENSION [☐ SINGLE GIRDER ☐ DOUBLE GIRDER]
- ○ JIB [☐ WALL ☐ PILLAR]
- ○ OTHER : [☐ GANTRY ☐ MONORAIL]

PERFORMANCE DATA :

		NORMAL	LOW
LIFTING SPEED [M/MIN.]	:		
MAIN HOOK	:	2	0,33
AUX. HOOK	:	N/A	N/A
TRAVERSING SPEED	:	20	5
TRAVELING SPEED	:	20	5

WINCH TYPE
- ☐ CRAB ■ HOIST

HOOK TYPE :
- ■ SINGLE ☐ TWIN

OPERATING SWITCH (*)
- ■ ON/OFF ■ UP/DOWN
- ■ EAST/WEST ■ SOUTH/NORTH
- ■ NORMAL/LOW [SPEED] ☐ OTHER :

PENDANT SWITCH
- ■ PUSH BUTTON ☐ RADIO CONTROL
- ☐ OTHER : (*)

WIRE ROPE SPECIFICATION
- TWIST : ☐ Z TYPE ☐ S TYPE ■ OTHER (*)
- DIAMETER [mm] : (*) SAFETY FACTOR : (*)

POWER FEEDING SYSTEM

HOISTING :	☐ CABLE REEL	☐ COLLECTOR
	■ FESTOON CABLE	
TRAVERSING :	☐ CABLE REEL	☐ COLLECTOR
	■ FESTOON CABLE	
TRAVELING :	☐ CABLE REEL	☐ COLLECTOR
	■ FESTOON CABLE	
PENDANT :	☐ CABLE REEL	☐ COLLECTOR
	■ FESTOON CABLE	

MATERIAL CONSTRUCTION

GIRDERS	:	**ASTM A 36 or Eq.**
TRAVELING WHEELS	:	**(*) (Non Sparking)**
	:	
DRUMS	:	**Hardened Steel**
WIRE ROPE	:	**Flow Steel, Independent Wire Rope Core (WRC)**
CHAIN	:	**N/A**
HOOKS	:	**(*) (Non Sparking)**
OTHER	:	**N/A**
	:	
	:	

DRIVER

SERVICE		MAIN	AUX.	TROLLEY	BRIDGE
REQUIRED NO.	:	1		2	2
MOTOR MFR.	:	AML (*)		AML (*)	AML (*)
RATED kW	:	7,5		2 x 0,65	2 x 0,45
TIME RATING	:	INTERMITTENT			
MOTOR TERMINAL BOX	:	Min IP 55 Ex'd'			
ENCLOSURE	:	Min IP 55 Ex'd'			
INSULATION CLASS	:	Class F			
TEMP. RISE [^{0}C]	:	Class B			
	:				
	:				
	:				

SITE AVAILABLE :
- POWER : AC 400 V, PHASE 3 Hz 50
- CONTROL : AC V, PHASE Hz
- REMARK : MOTOR SHALL BE ATEX Certificate / Explosion Proof

REMARKS

1. Travelling movement shall be completed with visual and audible alert
2. The crane shall be provided with walkaway, hand rails and platform to enable servicing of high level lighting within GEG building
3. Painting specification shall follow the document TMBP-01-ME-SPE-507 "Specification - Painting & Coating System for Mechanical".
4. A short circuit protection shall be completed with molded case circuit breaker and overload protection (bi-metallic / thermistor system).
5. The crane shall comply as per below documents:
- TMBP-01-ME-SPE-506 "Specification - OHC & Electrical Chain Hoist
- TMBP-01-ME-SPE-502 "Specification for Induction Motor
VENDOR shall provide laser measuring system or runway survey device
6. Whenever MIGAS certified is required. VENDOR is responsible to provide all document to obtain MIGAS certification

MECHANICAL DATASHEET FOR OHC & ELECTRICAL CHAIN HOIST

Project Name	Doc. No.	Rev.	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D124	A	8-Jan-26	11 OF 19

Facility Name	: **Fasilitas Produksi Stasiun Pengumpul (SP) TMB & KRG**	**Purchase Order No.**	: **TBA**
Location	: **Prabumulih, Indonesia**	**Requisition No.**	: **TBA**
Item Name	: **Overhead Crane GEG Shelter**		
Item No.	: **TBA**		
No. of Unit	: **1**		

ACCESSORIES

MAINTENANCE STAGE	:	■ YES	☐ NO
MAIN SWITCH BOX	:	■ YES	☐ NO
ALARM EQUIPMENT	:	■ YES	☐ NO
OVERLOAD CUT-OFF DEVICE	:	■ YES	☐ NO
RUN WAY RAILS/CLAMPS	:	■ YES	☐ NO
POWER INDICATOR LAMP	:	■ YES	☐ NO
END STOPPERS W/ BOLT & NUTS	:	■ YES	☐ NO
TRAVEL LIMIT SWITCHES	:	■ YES	☐ NO
PLATFORM, LADDERS & HANDRAILS	:	■ YES	☐ NO
SPACE HEATER	:	☐ YES	■ NO
LIGHTING	:	☐ YES	☐ NO
OTHER	:		
WEBBING SLING & WIRE SLING SWL 5 TON (4 EA	:	■ YES	☐ NO
SHACKLE SWL 5 TON (4 EA)	:	■ YES	☐ NO

INSPECTION AND TEST

		REQUIRED	WITNESS
MATERIAL INSPECTION	:	■	■
APPEARANCE CHECK	:	■	■
DIMENSION CHECK	:	■	■
RATED LOAD TEST	:	■	■
OVER LOAD TEST	:	■	■
SHIPPING PREPARATION	:	■	☐
FIELD TEST	:	■	■
OTHER	:		
FUNCTION TEST	:	■	■
PERFORMANCE TEST	:	■	■
WPS / PQR	:	■	■
INSTALLATION CHECK	:	■	■
	:	☐	☐

SKETCH

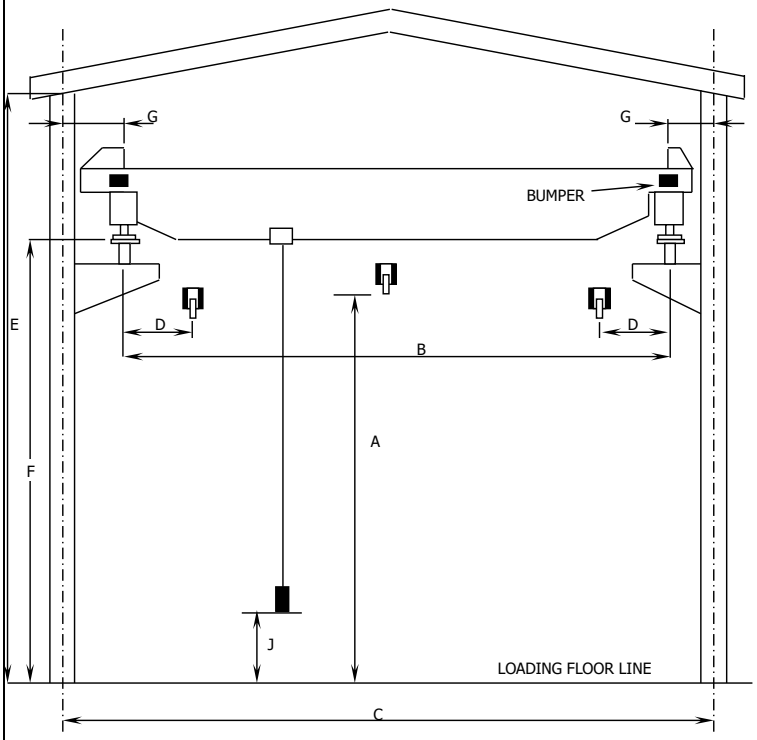

DESCRIPTIONS

CAPACITY [Ton]		:	20
MAXIMUM LIFTING HEIGHT [mm]	**A**	:	8600
SPAN OF RAIL [mm]	**B**	:	14000
SPAN OF COLUMN [mm]	**C**	:	15000
MINIMUM SIDE CLEARANCE [mm]	**D**	:	250
HEIGHT OF EAVES [mm]	**E**	:	10100
TOP OF RAIL BEAM HEIGHT [mm]	**F**	:	8600
MINIMUM OF RAIL COLUMN [mm]	**G**	:	500
PENDANT CONTROL HEIGHT [mm]	**J**	:	800
		:	
RUNWAY RAIL [mm]		:	23000

REMARKS

NOTE :

1) Non-sparking material shall be used
2) (*) Vendor to confirm
3) Control supply to be derived from 400 V feeder by vendor panel
4) Space heaters shall be provided for (*) kW motor and above
5) Running test of all motions shall be performed at site with 100% load
6) Crane name plate shall be provided. Each unit assembly (e.g. motor, gearbox, brakes, etc) shall also have nameplate of stainless steel or monel.

MECHANICAL DATASHEET FOR OHC & ELECTRICAL CHAIN HOIST

Project Name	Doc. No.	Rev.	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D124	A	8-Jan-26	12 OF 19

Facility Name : **Fasilitas Produksi Stasiun Pengumpul (SP) TMB & KRG**
Purchase Order No. : **TBA**
Location : **Prabumulih, Indonesia**
Requisition No. : **TBA**
Item Name : **Electric Hoist Test Pump and Transfer Pump Shelter**
Item No. : **TBA**
No. of Unit : **2**

DESIGN CONDITIONS

USE:
- ● MAINTENANCE
- ○ OPERATION
- ○ WAREHOUSE
- ○ OTHER :

EQUIPMENT DATA :

	MAIN HOOK	AUX. HOOK
CAPACITY [kg]	3000	N/A
LIFT [mm]	3900	N/A
SPAN [mm]	5500	N/A
TRAVERSING DISTANCE [mm]	15000	N/A
TRAVELING DISTANCE [meter]	-	N/A
OPERATING HOURS [HR/DAY]		

AMBIENT TEMPERATURE [^{0}C] MIN : 24,7 MAX. : 30,3
RELATIVE HUMIDITY [%] MIN : 80,0 MAX. : 88,0
DESIGN TEMPERATURE [^{0}C] :
CODE & STANDARD :
- ☐ CMAA ☐ JIS ☐ DIN ☐ BS
- ■ OTHER : ASME B30.10 / ASME B30.15 / ASME B30.17

OPERATING METHOD :
HOISTING :
- ☐ MANUAL ■ PENDANT
- ☐ CABIN ☐ OTHER :

TRAVERSING :
- ☐ MANUAL ■ PENDANT
- ☐ CABIN ☐ OTHER :

TRAVELING :
- ☐ MANUAL ■ PENDANT
- ☐ CABIN ☐ OTHER :

LOCATION OF CONTROL :
- ☐ END OF CRANE ☐ CENTER
- ■ OTHER : On the trolley and on the bridge

MATERIAL HANDLED : Test Pump and Transfer Pump

BUILDING INFORMATION
- COLUMN CENTER SPAN [mm] :
- RAIL SPAN [mm] : 5500
- LONGITUDINAL LENGTH [mm] : 15000
- CLEARANCE BETWEEN RAILS & EAVES [mm] : Min. 1500
- RAIL SPECIFICATION : RAIL SQUARE BAR
- ALLOWABLE WHEEL LOAD [KG] : (*)

ELECTRICAL AREA CLASSIFICATION (IEC)
- ● CLASS 1 ZONE 2 ○ NON HAZARDOUS
- GAS GROUP: 2A DIV 2
- TEMP. CLASS:

MATERIAL CONSTRUCTION

GIRDERS	ASTM A 36 or Eq.
TRAVELING WHEELS	(*) (Non Sparking)
DRUMS	Hardened Steel
HOIST CHAIN	Flow Steel, Independent Wire Rope Core (WRC)
CHAIN (MOVE TROLLEY)	N/A
HOOKS	(*) (Non Sparking)
OTHER	N/A

CONSTRUCTION FEATURES

TYPE :
- ● OVERHEAD [☐ SINGLE GIRDER ☐ DOUBLE GIRDER]
- ○ SUSPENSION [☐ SINGLE GIRDER ☐ DOUBLE GIRDER]
- ○ JIB [☐ WALL ☐ PILLAR]
- ○ OTHER : [☐ GANTRY ■ MONORAIL]

PERFORMANCE DATA :

	NORMAL	LOW
LIFTING SPEED [M/MIN.]		
MAIN HOOK	5	0,83
AUX. HOOK	N/A	N/A
TRAVERSING SPEED	20	5
TRAVELING SPEED	N/A	N/A

WINCH TYPE
- ☐ CRAB ■ HOIST

HOOK TYPE :
- ■ SINGLE ☐ TWIN

OPERATING SWITCH (*)
- ■ ON/OFF ■ UP/DOWN
- ■ EAST/WEST ■ SOUTH/NORTH
- ■ NORMAL/LOW [SPEED] ☐ OTHER :

PENDANT SWITCH
- ■ PUSH BUTTON ☐ RADIO CONTROL
- ☐ OTHER : (*)

WIRE ROPE SPECIFICATION
- TWIST : ☐ Z TYPE ☐ S TYPE
- ■ OTHER : (*)
- DIAMETER [mm] : (*) SAFETY FACTOR :

POWER FEEDING SYSTEM (Remark 1)
- HOISTING : ☐ CABLE REEL ☐ COLLECTOR ■ FESTOON CABLE
- TRAVERSING : ☐ CABLE REEL ☐ COLLECTOR ■ FESTOON CABLE
- TRAVELING : ☐ CABLE REEL ☐ COLLECTOR ■ FESTOON CABLE
- PENDANT : ☐ CABLE REEL ☐ COLLECTOR ■ FESTOON CABLE

DRIVER (Remark 2)

SERVICE	MAIN	AUX.	TROLLEY	BRIDGE
REQUIRED NO.	(*)		(*)	(*)
MOTOR MFR.	(*)		(*)	(*)
RATED kW	3,6		0,45	
TIME RATING	INTERMITTENT			
MOTOR TERMINAL BOX	Min IP 55 Ex'd'			
ENCLOSURE	Min IP 55 Ex'd'			
INSULATION CLASS	Class F			
TEMP. RISE [^{0}C]	Class B			

SITE AVAILABLE :
- POWER : AC 400 V, PHASE 3 Hz 50
- CONTROL : AC V, PHASE Hz
- REMARK : MOTOR SHALL BE ATEX Certificate / Explosion Proof

REMARKS

1. Travelling movement shall be completed with visual and audible alert
2. The crane shall be provided with walkaway, hand rails and platform to enable servicing of high level lighting within Pump building
3. Painting specification shall follow the document TMBP-01-ME-SPE-501 "General Painting Specification".
4. A short circuit protection shall be completed with molded case circuit breaker and overload protection (bi-metallic / thermistor system).
5. The crane shall comply as per below documents:
- TMBP-01-ME-SPE-506 "Specification - OHC & Electrical Chain Hoist
- TMBP-01-ME-SPE-502 "Specification for Induction Motor
VENDOR shall provide laser measuring system or runway survey device
6. Whenever MIGAS certified is required. VENDOR is responsible to provide all document to obtain MIGAS certification

MECHANICAL DATASHEET FOR OHC & ELECTRICAL CHAIN HOIST

Project Name	Doc. No.	Rev.	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D124	A	8-Jan-26	13 OF 19

Facility Name	: **Fasilitas Produksi Stasiun Pengumpul (SP) TMB & KRG**	**Purchase Order No.**	: **TBA**
Location	: **Prabumulih, Indonesia**	**Requisition No.**	: **TBA**
Item Name	: **Electric Hoist Test Pump and Transfer Pump Shelter**		
Item No.	: **TBA**		
No. of Unit	: **2**		

ACCESSORIES

MAINTENANCE STAGE	:	■ YES	☐ NO
MAIN SWITCH BOX	:	■ YES	☐ NO
ALARM EQUIPMENT	:	■ YES	☐ NO
OVERLOAD CUT-OFF DEVICE	:	■ YES	☐ NO
RUN WAY RAILS/CLAMPS	:	■ YES	☐ NO
POWER INDICATOR LAMP	:	■ YES	☐ NO
END STOPPERS W/ BOLT & NUTS	:	■ YES	☐ NO
TRAVEL LIMIT SWITCHES	:	■ YES	☐ NO
PLATFORM, LADDERS & HANDRAILS	:	■ YES	☐ NO
SPACE HEATER	:	☐ YES	■ NO
LIGHTING	:	☐ YES	☐ NO
OTHER	:		
WEBBING SLING & WIRE SLING SWL 5 TON (4 EA	:	■ YES	☐ NO
SHACKLE SWL 5 TON (4 EA)	:	■ YES	☐ NO

INSPECTION AND TEST

		REQUIRED	WITNESS
MATERIAL INSPECTION	:	■	■
APPEARANCE CHECK	:	■	■
DIMENSION CHECK	:	■	■
RATED LOAD TEST	:	■	■
OVER LOAD TEST	:	■	■
SHIPPING PREPARATION	:	■	☐
FIELD TEST	:	■	■
OTHER	:		
FUNCTION TEST	:	■	■
PERFORMANCE TEST	:	■	■
WPS / PQR	:	■	■
INSTALLATION CHECK	:	■	■
	:	☐	☐

SKETCH

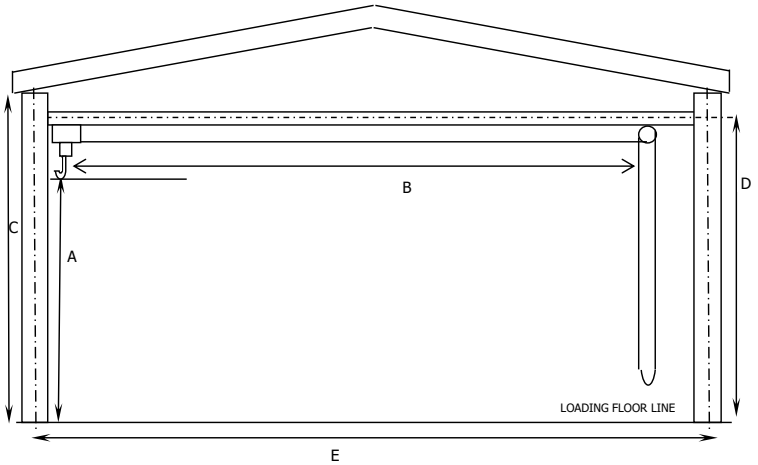

DESCRIPTIONS

CAPACITY [Ton]		:	3
MAXIMUM LIFTING HEIGHT [mm]	**A**	:	3900
TROLLEY MAXIMUM TRANSVERSE DISTANCE [MM]	**B**	:	15000
HEIGHT OF EAVES [mm]	**C**	:	(*)
TOP OF RAIL BEAM HEIGHT [mm]	**D**	:	(*)
SPAN OF COLUMN (Side View) [mm]	**E**	:	(*)

REMARKS

NOTE :

1) Non-sparking material shall be used

2) (*) Vendor to confirm

3) Running test of shall be performed at site with 100% load

MECHANICAL DATASHEET FOR OHC & ELECTRICAL CHAIN HOIST

Project Name	Doc. No.	Rev.	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D124	A	8-Jan-26	14 OF 19

Facility Name	: **Fasilitas Produksi Stasiun Pengumpul (SP) TMB & KRG**	**Purchase Order No.**	: **TBA**
Location	: **Prabumulih, Indonesia**	**Requisition No.**	: **TBA**
Item Name	: **Manual Hoist Instrument Air Package Shelter**		
Item No.	: **TBA**		
No. of Unit	: **1**		

DESIGN CONDITIONS

USE:
- ● MAINTENANCE
- ○ OPERATION
- ○ WAREHOUSE
- ○ OTHER :

EQUIPMENT DATA :

		MAIN HOOK	AUX. HOOK
CAPACITY [kg]	:	**5000**	N/A
LIFT [mm]	:	**3500**	N/A
SPAN [mm]	:	**5000**	N/A
TRAVERSING DISTANCE [mm]	:	**8000**	N/A
TRAVELING DISTANCE [meter]	:	**-**	N/A
OPERATING HOURS [HR/DAY]	:		

AMBIENT TEMPERATURE [^{0}C] MIN : **24,7** MAX. : **30,3**

RELATIVE HUMIDITY [%] MIN : **80,0** MAX. : **88,0**

DESIGN TEMPERATURE [^{0}C] :

CODE & STANDARD :
- ☐ CMAA ☐ JIS ☐ DIN ☐ BS
- ■ OTHER : ASME B30.10 / ASME B30.15 / ASME B30.17

OPERATING METHOD :

HOISTING :
- ■ MANUAL ☐ PENDANT
- ☐ CABIN ☐ OTHER :

TRAVERSING :
- ■ MANUAL ☐ PENDANT
- ☐ CABIN ☐ OTHER :

TRAVELING :
- ☐ MANUAL ☐ PENDANT
- ☐ CABIN ■ OTHER : **N/A**

LOCATION OF CONTROL :
- ☐ END OF CRANE ☐ CENTER
- ■ OTHER : On the trolley and on the bridge

MATERIAL HANDLED : Instrument Air Package

BUILDING INFORMATION

COLUMN CENTER SPAN [mm]	:	
RAIL SPAN [mm]	:	**5000**
LONGITUDINAL LENGTH [mm]	:	**8000**
CLEARANCE BETWEEN RAILS & EAVES [mm]	:	**Min. 1500**
RAIL SPECIFICATION	:	**RAIL SQUARE BAR**
ALLOWABLE WHEEL LOAD [KG]	:	**(*)**

ELECTRICAL AREA CLASSIFICATION (IEC)
- ○ CLASS **1** ZONE **2** ○ NON HAZARDOUS
- GAS GROUP: **2A** DIV **2**
- TEMP. CLASS:

MATERIAL CONSTRUCTION

GIRDERS	:	**ASTM A 36 or Eq.**
TRAVELING WHEELS	:	**(*) (Non Sparking)**
	:	
DRUMS	:	**Hardened Steel**
HOIST CHAIN	:	**Flow Steel, Independent Wire Rope Core (WRC)**
CHAIN (MOVE TROLLEY)	:	**N/A**
HOOKS	:	**(*) (Non Sparking)**
OTHER	:	**N/A**
	:	
	:	

CONSTRUCTION FEATURES

TYPE :
- ● OVERHEAD [☐ SINGLE GIRDER ☐ DOUBLE GIRDER]
- ○ SUSPENSION [☐ SINGLE GIRDER ☐ DOUBLE GIRDER]
- ○ JIB [☐ WALL ☐ PILLAR]
- ○ OTHER : [☐ GANTRY ■ MONORAIL]

PERFORMANCE DATA :

		NORMAL	LOW
LIFTING SPEED [M/MIN.]	:		
MAIN HOOK	:	N/A	N/A
AUX. HOOK	:	N/A	N/A
TRAVERSING SPEED	:	N/A	N/A
TRAVELING SPEED	:	N/A	N/A

WINCH TYPE
- ☐ CRAB ☐ HOIST ■ CHAIN

HOOK TYPE :
- ■ SINGLE ☐ TWIN

OPERATING SWITCH (*)
- ☐ ON/OFF ☐ UP/DOWN
- ☐ EAST/WEST ☐ SOUTH/NORTH
- ☐ NORMAL/LOW [SPEED] ☐ OTHER :

PENDANT SWITCH
- ☐ PUSH BUTTON ☐ RADIO CONTROL
- ☐ OTHER : (*)

WIRE ROPE SPECIFICATION
- TWIST : ☐ Z TYPE ☐ S TYPE
- ■ OTHER : (*)
- DIAMETER [mm] : (*) SAFETY FACTOR :

POWER FEEDING SYSTEM (Remark 1)
- HOISTING : ☐ CABLE REEL ☐ COLLECTOR
- ☐ FESTOON CABLE
- TRAVERSING : ☐ CABLE REEL ☐ COLLECTOR
- ☐ FESTOON CABLE
- TRAVELING : ☐ CABLE REEL ☐ COLLECTOR
- ☐ FESTOON CABLE
- PENDANT : ☐ CABLE REEL ☐ COLLECTOR
- ☐ FESTOON CABLE

DRIVER (Remark 2)

SERVICE		MAIN	AUX.	TROLLEY	BRIDGE
REQUIRED NO.	:				
MOTOR MFR.	:				
RATED kW	:				
TIME RATING	:				
MOTOR TERMINAL BOX	:				
ENCLOSURE	:				
INSULATION CLASS	:				
TEMP. RISE [^{0}C]	:				
	:				
	:				
	:				

SITE AVAILABLE :
- POWER : AC V, PHASE Hz
- CONTROL : AC V, PHASE Hz
- REMARK :

REMARKS

1. Travelling movement shall be completed with visual and audible alert
2. The crane shall be provided with walkaway, hand rails and platform to enable servicing of high level lighting within IA Package building
3. Painting specification shall follow the document TMBP-01-ME-SPE-501 "General Painting Specification".
4. A short circuit protection shall be completed with molded case circuit breaker and overload protection (bi-metallic / thermistor system).
5. The crane shall comply as per below documents:

- TMBP-01-ME-SPE-506 "Specification - OHC & Electrical Chain Hoist
- TMBP-01-ME-SPE-502 "Specification for Induction Motor

VENDOR shall provide laser measuring system or runway survey device

6. Whenever MIGAS certified is required. VENDOR is responsible to provide all document to obtain MIGAS certification

MECHANICAL DATASHEET FOR OHC & ELECTRICAL CHAIN HOIST

Project Name	Doc. No.	Rev.	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D124	A	8-Jan-26	15 OF 19

Facility Name	: **Fasilitas Produksi Stasiun Pengumpul (SP) TMB & KRG**	**Purchase Order No.**	: **TBA**
Location	: **Prabumulih, Indonesia**	**Requisition No.**	: **TBA**
Item Name	: **Manual Hoist Instrument Air Package Shelter**		
Item No.	: **TBA**		
No. of Unit	: **1**		

ACCESSORIES

MAINTENANCE STAGE	:	■ YES	☐ NO
MAIN SWITCH BOX	:	■ YES	☐ NO
ALARM EQUIPMENT	:	■ YES	☐ NO
OVERLOAD CUT-OFF DEVICE	:	■ YES	☐ NO
RUN WAY RAILS/CLAMPS	:	■ YES	☐ NO
POWER INDICATOR LAMP	:	■ YES	☐ NO
END STOPPERS W/ BOLT & NUTS	:	■ YES	☐ NO
TRAVEL LIMIT SWITCHES	:	■ YES	☐ NO
PLATFORM, LADDERS & HANDRAILS	:	■ YES	☐ NO
SPACE HEATER	:	■ YES	☐ NO
LIGHTING	:	☐ YES	☐ NO
OTHER	:		
WEBBING SLING & WIRE SLING SWL 5 TON (4 EA	:	■ YES	☐ NO
SHACKLE SWL 5 TON (4 EA)	:	■ YES	☐ NO

INSPECTION AND TEST

		REQUIRED	WITNESS
MATERIAL INSPECTION	:	■	■
APPEARANCE CHECK	:	■	■
DIMENSION CHECK	:	■	■
RATED LOAD TEST	:	■	■
OVER LOAD TEST	:	■	■
SHIPPING PREPARATION	:	■	☐
FIELD TEST	:	■	■
OTHER	:		
FUNCTION TEST	:	■	■
PERFORMANCE TEST	:	■	■
WPS / PQR	:	■	■
INSTALLATION CHECK	:	■	■
	:	☐	☐

SKETCH

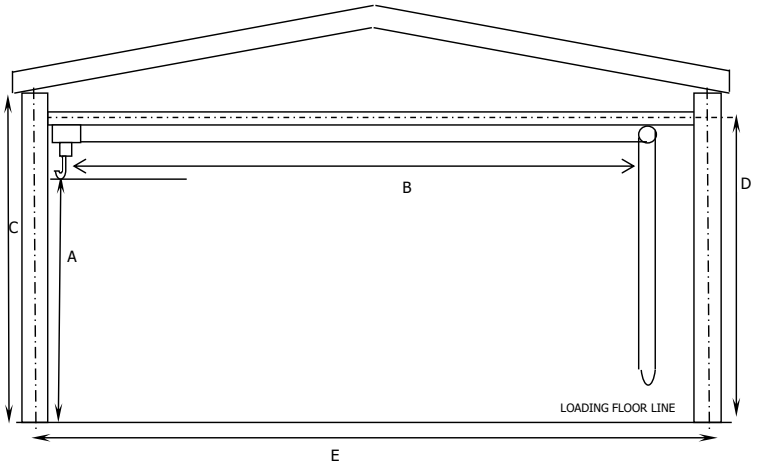

DESCRIPTIONS

CAPACITY [Ton]		:	5
MAXIMUM LIFTING HEIGHT [mm]	**A**	:	3500
TROLLEY MAXIMUM TRANSVERSE DISTANCE [MM]	**B**	:	8000
HEIGHT OF EAVES [mm]	**C**	:	(*)
TOP OF RAIL BEAM HEIGHT [mm]	**D**	:	(*)
SPAN OF COLUMN (Side View) [mm]	**E**	:	(*)

REMARKS

NOTE :

1) Non-sparking material shall be used

2) (*) Vendor to confirm

3) Running test of shall be performed at site with 100% load

MECHANICAL DATASHEET FOR OHC & ELECTRICAL CHAIN HOIST

Project Name	Doc. No.	Rev.	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D124	A	8-Jan-26	16 OF 19

Facility Name	: **Fasilitas Produksi Stasiun Pengumpul (SP) TMB & KRG**	**Purchase Order No.**	: **TBA**
Location	: **Prabumulih, Indonesia**	**Requisition No.**	: **TBA**
Item Name	: **Manual Hoist Fire Water Pump Shelter**		
Item No.	: **TBA**		
No. of Unit	: **1**		

DESIGN CONDITIONS

USE:
- ● MAINTENANCE
- ○ OPERATION
- ○ WAREHOUSE
- ○ OTHER :

EQUIPMENT DATA :

		MAIN HOOK	AUX. HOOK
CAPACITY [kg]	:	**5000**	N/A
LIFT [mm]	:	**3600**	N/A
SPAN [mm]	:	**4700**	N/A
TRAVERSING DISTANCE [mm]	:	**9100**	N/A
TRAVELING DISTANCE [meter]	:	**-**	N/A
OPERATING HOURS [HR/DAY]	:		

AMBIENT TEMPERATURE [^{0}C] MIN : **24,7** MAX. : **30,3**

RELATIVE HUMIDITY [%] MIN : **80,0** MAX. : **88,0**

DESIGN TEMPERATURE [^{0}C] :

CODE & STANDARD :
- ☐ CMAA ☐ JIS ☐ DIN ☐ BS
- ■ OTHER : ASME B30.10 / ASME B30.15 / ASME B30.17

OPERATING METHOD :

HOISTING :
- ■ MANUAL ☐ PENDANT
- ☐ CABIN ☐ OTHER :

TRAVERSING :
- ■ MANUAL ☐ PENDANT
- ☐ CABIN ☐ OTHER :

TRAVELING :
- ☐ MANUAL ☐ PENDANT
- ☐ CABIN ■ OTHER : **N/A**

LOCATION OF CONTROL :
- ☐ END OF CRANE ☐ CENTER
- ■ OTHER : On the trolley and on the bridge

MATERIAL HANDLED : Fire Water Pump Package

BUILDING INFORMATION

COLUMN CENTER SPAN [mm]	:	
RAIL SPAN [mm]	:	**4700**
LONGITUDINAL LENGTH [mm]	:	**9100**
CLEARANCE BETWEEN RAILS & EAVES [mm]	:	**Min. 1500**
RAIL SPECIFICATION	:	**RAIL SQUARE BAR**
ALLOWABLE WHEEL LOAD [KG]	:	**(*)**

ELECTRICAL AREA CLASSIFICATION (IEC)

○ CLASS **1** ZONE **2** ○ NON HAZARDOUS

GAS GROUP: **2A** DIV **2**

TEMP. CLASS:

MATERIAL CONSTRUCTION

GIRDERS	:	**ASTM A 36 or Eq.**
TRAVELING WHEELS	:	**(*) (Non Sparking)**
	:	
DRUMS	:	**Hardened Steel**
HOIST CHAIN	:	**Flow Steel, Independent Wire Rope Core (WRC)**
CHAIN (MOVE TROLLEY)	:	**N/A**
HOOKS	:	**(*) (Non Sparking)**
OTHER	:	**N/A**
	:	
	:	

CONSTRUCTION FEATURES

TYPE :
- ● OVERHEAD [☐ SINGLE GIRDER ☐ DOUBLE GIRDER]
- ○ SUSPENSION [☐ SINGLE GIRDER ☐ DOUBLE GIRDER]
- ○ JIB [☐ WALL ☐ PILLAR]
- ○ OTHER : [☐ GANTRY ■ MONORAIL]

PERFORMANCE DATA :

		NORMAL	LOW
LIFTING SPEED [M/MIN.]	:		
MAIN HOOK	:	N/A	N/A
AUX. HOOK	:	N/A	N/A
TRAVERSING SPEED	:	N/A	N/A
TRAVELING SPEED	:	N/A	N/A

WINCH TYPE
- ☐ CRAB ☐ HOIST ■ CHAIN

HOOK TYPE :
- ■ SINGLE ☐ TWIN

OPERATING SWITCH (*)
- ☐ ON/OFF ☐ UP/DOWN
- ☐ EAST/WEST ☐ SOUTH/NORTH
- ☐ NORMAL/LOW [SPEED] ☐ OTHER :

PENDANT SWITCH
- ☐ PUSH BUTTON ☐ RADIO CONTROL
- ☐ OTHER : (*)

WIRE ROPE SPECIFICATION

TWIST :
- ☐ Z TYPE ☐ S TYPE
- ■ OTHER : (*)

DIAMETER [mm] : (*) SAFETY FACTOR :

POWER FEEDING SYSTEM (Remark 1)

HOISTING :	☐ CABLE REEL	☐ COLLECTOR
	☐ FESTOON CABLE	
TRAVERSING :	☐ CABLE REEL	☐ COLLECTOR
	☐ FESTOON CABLE	
TRAVELING :	☐ CABLE REEL	☐ COLLECTOR
	☐ FESTOON CABLE	
PENDANT :	☐ CABLE REEL	☐ COLLECTOR
	☐ FESTOON CABLE	

DRIVER (Remark 2)

SERVICE		MAIN	AUX.	TROLLEY	BRIDGE
REQUIRED NO.	:				
MOTOR MFR.	:				
RATED kW	:				
TIME RATING	:				
MOTOR TERMINAL BOX	:				
ENCLOSURE	:				
INSULATION CLASS	:				
TEMP. RISE [^{0}C]	:				
	:				
	:				
	:				

SITE AVAILABLE :

POWER : AC V, PHASE Hz

CONTROL : AC V, PHASE Hz

REMARK :

REMARKS

1. Travelling movement shall be completed with visual and audible alert
2. The crane shall be provided with walkaway, hand rails and platform to enable servicing of high level lighting within IA Package building
3. Painting specification shall follow the document TMBP-01-ME-SPE-501 "General Painting Specification".
4. A short circuit protection shall be completed with molded case circuit breaker and overload protection (bi-metallic / thermistor system).
5. The crane shall comply as per below documents:

- TMBP-01-ME-SPE-506 "Specification - OHC & Electrical Chain Hoist
- TMBP-01-ME-SPE-502 "Specification for Induction Motor

VENDOR shall provide laser measuring system or runway survey device

6. Whenever MIGAS certified is required. VENDOR is responsible to provide all document to obtain MIGAS certification

MECHANICAL DATASHEET FOR OHC & ELECTRICAL CHAIN HOIST

Project Name	Doc. No.	Rev.	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D124	A	8-Jan-26	17 OF 19

Facility Name	: **Fasilitas Produksi Stasiun Pengumpul (SP) TMB & KRG**	**Purchase Order No.**	: **TBA**
Location	: **Prabumulih, Indonesia**	**Requisition No.**	: **TBA**
Item Name	: **Manual Hoist Fire Water Pump Shelter**		
Item No.	: **TBA**		
No. of Unit	: **1**		

ACCESSORIES

MAINTENANCE STAGE	:	■ YES	☐ NO
MAIN SWITCH BOX	:	■ YES	☐ NO
ALARM EQUIPMENT	:	■ YES	☐ NO
OVERLOAD CUT-OFF DEVICE	:	■ YES	☐ NO
RUN WAY RAILS/CLAMPS	:	■ YES	☐ NO
POWER INDICATOR LAMP	:	■ YES	☐ NO
END STOPPERS W/ BOLT & NUTS	:	■ YES	☐ NO
TRAVEL LIMIT SWITCHES	:	■ YES	☐ NO
PLATFORM, LADDERS & HANDRAILS	:	■ YES	☐ NO
SPACE HEATER	:	■ YES	☐ NO
LIGHTING	:	☐ YES	☐ NO
OTHER	:		
WEBBING SLING & WIRE SLING SWL 5 TON (4 EA	:	■ YES	☐ NO
SHACKLE SWL 5 TON (4 EA)	:	■ YES	☐ NO

INSPECTION AND TEST

		REQUIRED	WITNESS
MATERIAL INSPECTION	:	■	■
APPEARANCE CHECK	:	■	■
DIMENSION CHECK	:	■	■
RATED LOAD TEST	:	■	■
OVER LOAD TEST	:	■	■
SHIPPING PREPARATION	:	■	☐
FIELD TEST	:	■	■
OTHER	:		
FUNCTION TEST	:	■	■
PERFORMANCE TEST	:	■	■
WPS / PQR	:	■	■
INSTALLATION CHECK	:	■	■
	:	☐	☐

SKETCH

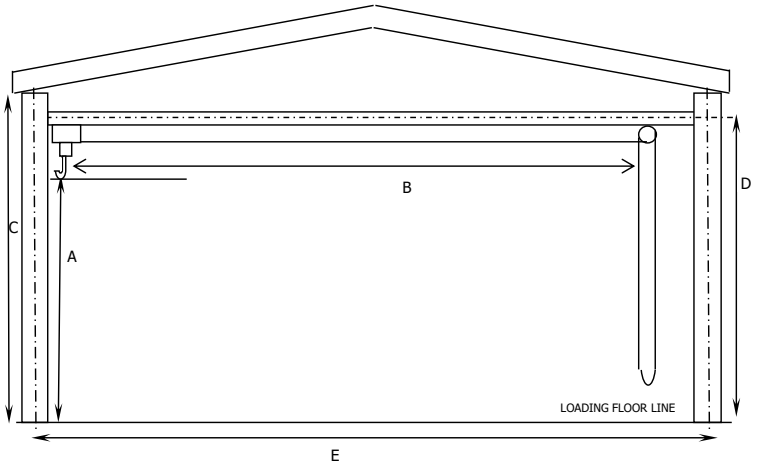

DESCRIPTIONS

CAPACITY [Ton]		:	5
MAXIMUM LIFTING HEIGHT [mm]	**A**	:	3600
TROLLEY MAXIMUM TRANSVERSE DISTANCE [MM]	**B**	:	9100
HEIGHT OF EAVES [mm]	**C**	:	(*)
TOP OF RAIL BEAM HEIGHT [mm]	**D**	:	(*)
SPAN OF COLUMN (Side View) [mm]	**E**	:	(*)

REMARKS

NOTE :

1) Non-sparking material shall be used

2) (*) Vendor to confirm

3) Running test of shall be performed at site with 100% load

MECHANICAL DATASHEET FOR OHC & ELECTRICAL CHAIN HOIST

Project Name	Doc. No.	Rev.	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D124	A	8-Jan-26	18 OF 19

Facility Name	: **Fasilitas Produksi Stasiun Pengumpul (SP) TMB & KRG**	**Purchase Order No.**	: **TBA**
Location	: **Prabumulih, Indonesia**	**Requisition No.**	: **TBA**
Item Name	: **Manual Hoist Oily Pit Shelter**		
Item No.	: **TBA**		
No. of Unit	: **1**		

DESIGN CONDITIONS

USE:
- ● MAINTENANCE
- ○ OPERATION
- ○ WAREHOUSE
- ○ OTHER :

EQUIPMENT DATA :

		MAIN HOOK	AUX. HOOK
CAPACITY [kg]	:	5000	N/A
LIFT [mm]	:	3600	N/A
SPAN [mm]	:	10000	N/A
TRAVERSING DISTANCE [mm]	:	7000	N/A
TRAVELING DISTANCE [meter]	:	-	N/A
OPERATING HOURS [HR/DAY]	:		

AMBIENT TEMPERATURE [^{0}C] MIN : 24,7 MAX. : 30,3

RELATIVE HUMIDITY [%] MIN : 80,0 MAX. : 88,0

DESIGN TEMPERATURE [^{0}C] :

CODE & STANDARD :
- ☐ CMAA ☐ JIS ☐ DIN ☐ BS
- ■ OTHER : ASME B30.10 / ASME B30.15 / ASME B30.17

OPERATING METHOD :

HOISTING :
- ■ MANUAL ☐ PENDANT
- ☐ CABIN ☐ OTHER :

TRAVERSING :
- ■ MANUAL ☐ PENDANT
- ☐ CABIN ☐ OTHER :

TRAVELING :
- ☐ MANUAL ☐ PENDANT
- ☐ CABIN ■ OTHER : N/A

LOCATION OF CONTROL :
- ☐ END OF CRANE ☐ CENTER
- ■ OTHER : On the trolley and on the bridge

MATERIAL HANDLED : Sump Pump Package

BUILDING INFORMATION

COLUMN CENTER SPAN [mm]	:	3500
RAIL SPAN [mm]	:	7000
LONGITUDINAL LENGTH [mm]	:	10000
CLEARANCE BETWEEN RAILS & EAVES [mm]	:	Min. 1500
RAIL SPECIFICATION	:	RAIL SQUARE BAR
ALLOWABLE WHEEL LOAD [KG]	:	(*)

ELECTRICAL AREA CLASSIFICATION (IEC)

○ CLASS 1 ZONE 2 ○ NON HAZARDOUS

GAS GROUP: 2A DIV 2

TEMP. CLASS:

MATERIAL CONSTRUCTION

GIRDERS	:	**ASTM A 36 or Eq.**
TRAVELING WHEELS	:	**(*) (Non Sparking)**
	:	
DRUMS	:	**Hardened Steel**
HOIST CHAIN	:	**Flow Steel, Independent Wire Rope Core (WRC)**
CHAIN (MOVE TROLLEY)	:	**N/A**
HOOKS	:	**(*) (Non Sparking)**
OTHER	:	**N/A**
	:	
	:	

CONSTRUCTION FEATURES

TYPE :
- ● OVERHEAD [☐ SINGLE GIRDER ☐ DOUBLE GIRDER]
- ○ SUSPENSION [☐ SINGLE GIRDER ☐ DOUBLE GIRDER]
- ○ JIB [☐ WALL ☐ PILLAR]
- ○ OTHER : [☐ GANTRY ■ MONORAIL]

PERFORMANCE DATA :

		NORMAL	LOW
LIFTING SPEED [M/MIN.]	:		
MAIN HOOK	:	N/A	N/A
AUX. HOOK	:	N/A	N/A
TRAVERSING SPEED	:	N/A	N/A
TRAVELING SPEED	:	N/A	N/A

WINCH TYPE
- ☐ CRAB ☐ HOIST ■ CHAIN

HOOK TYPE :
- ■ SINGLE ☐ TWIN

OPERATING SWITCH (*)
- ☐ ON/OFF ☐ UP/DOWN
- ☐ EAST/WEST ☐ SOUTH/NORTH
- ☐ NORMAL/LOW [SPEED] ☐ OTHER :

PENDANT SWITCH
- ☐ PUSH BUTTON ☐ RADIO CONTROL
- ☐ OTHER : (*)

WIRE ROPE SPECIFICATION

TWIST :
- ☐ Z TYPE ☐ S TYPE
- ■ OTHER : (*)

DIAMETER [mm] : (*) SAFETY FACTOR :

POWER FEEDING SYSTEM (Remark 1)

HOISTING :	☐ CABLE REEL	☐ COLLECTOR
	☐ FESTOON CABLE	
TRAVERSING :	☐ CABLE REEL	☐ COLLECTOR
	☐ FESTOON CABLE	
TRAVELING :	☐ CABLE REEL	☐ COLLECTOR
	☐ FESTOON CABLE	
PENDANT :	☐ CABLE REEL	☐ COLLECTOR
	☐ FESTOON CABLE	

DRIVER (Remark 2)

SERVICE		MAIN	AUX.	TROLLEY	BRIDGE
REQUIRED NO.	:				
MOTOR MFR.	:				
RATED kW	:				
TIME RATING	:				
MOTOR TERMINAL BOX	:				
ENCLOSURE	:				
INSULATION CLASS	:				
TEMP. RISE [^{0}C]	:				
	:				
	:				
	:				

SITE AVAILABLE :

POWER : AC V, PHASE Hz

CONTROL : AC V, PHASE Hz

REMARK :

REMARKS

1. Travelling movement shall be completed with visual and audible alert
2. The crane shall be provided with walkaway, hand rails and platform to enable servicing of high level lighting within IA Package building
3. Painting specification shall follow the document TMBP-01-ME-SPE-501 "General Painting Specification".
4. A short circuit protection shall be completed with molded case circuit breaker and overload protection (bi-metallic / thermistor system).
5. The crane shall comply as per below documents:

- TMBP-01-ME-SPE-506 "Specification - OHC & Electrical Chain Hoist
- TMBP-01-ME-SPE-502 "Specification for Induction Motor

VENDOR shall provide laser measuring system or runway survey device

6. Whenever MIGAS certified is required. VENDOR is responsible to provide all document to obtain MIGAS certification

MECHANICAL DATASHEET FOR OHC & ELECTRICAL CHAIN HOIST

Project Name	Doc. No.	Rev.	Date	Page
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR	TMBP-SP001-ME-DST-D124	A	8-Jan-26	19 OF 19

Facility Name	: **Fasilitas Produksi Stasiun Pengumpul (SP) TMB & KRG**	**Purchase Order No.**	: **TBA**
Location	: **Prabumulih, Indonesia**	**Requisition No.**	: **TBA**
Item Name	: **Manual Hoist Oily Pit Shelter**		
Item No.	: **TBA**		
No. of Unit	: **1**		

ACCESSORIES

MAINTENANCE STAGE	:	■ YES	☐ NO
MAIN SWITCH BOX	:	■ YES	☐ NO
ALARM EQUIPMENT	:	■ YES	☐ NO
OVERLOAD CUT-OFF DEVICE	:	■ YES	☐ NO
RUN WAY RAILS/CLAMPS	:	■ YES	☐ NO
POWER INDICATOR LAMP	:	■ YES	☐ NO
END STOPPERS W/ BOLT & NUTS	:	■ YES	☐ NO
TRAVEL LIMIT SWITCHES	:	■ YES	☐ NO
PLATFORM, LADDERS & HANDRAILS	:	■ YES	☐ NO
SPACE HEATER	:	■ YES	☐ NO
LIGHTING	:	☐ YES	☐ NO
OTHER	:		
WEBBING SLING & WIRE SLING SWL 5 TON (4 EA	:	■ YES	☐ NO
SHACKLE SWL 5 TON (4 EA)	:	■ YES	☐ NO

INSPECTION AND TEST

		REQUIRED	WITNESS
MATERIAL INSPECTION	:	■	■
APPEARANCE CHECK	:	■	■
DIMENSION CHECK	:	■	■
RATED LOAD TEST	:	■	■
OVER LOAD TEST	:	■	■
SHIPPING PREPARATION	:	■	☐
FIELD TEST	:	■	■
OTHER	:		
FUNCTION TEST	:	■	■
PERFORMANCE TEST	:	■	■
WPS / PQR	:	■	■
INSTALLATION CHECK	:	■	■
	:	☐	☐

SKETCH

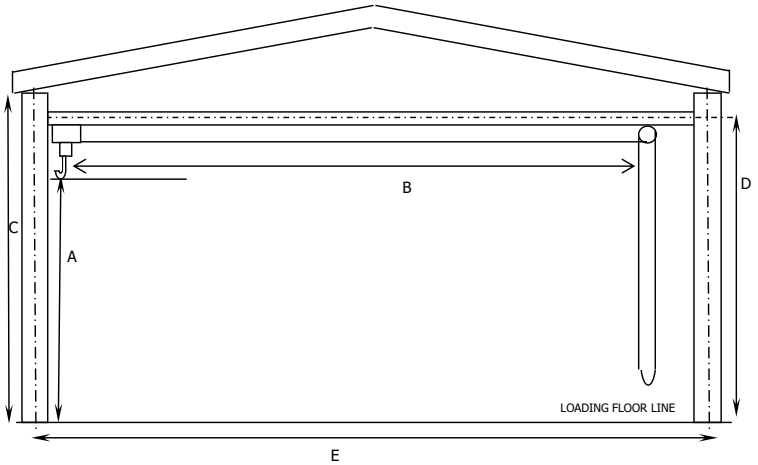

DESCRIPTIONS

CAPACITY [Ton]		:	5
MAXIMUM LIFTING HEIGHT [mm]	**A**	:	3600
TROLLEY MAXIMUM TRANSVERSE DISTANCE [MM]	**B**	:	7000
HEIGHT OF EAVES [mm]	**C**	:	(*)
TOP OF RAIL BEAM HEIGHT [mm]	**D**	:	(*)
SPAN OF COLUMN (Side View) [mm]	**E**	:	(*)

REMARKS

NOTE :

1) Non-sparking material shall be used

2) (*) Vendor to confirm

3) Running test of shall be performed at site with 100% load