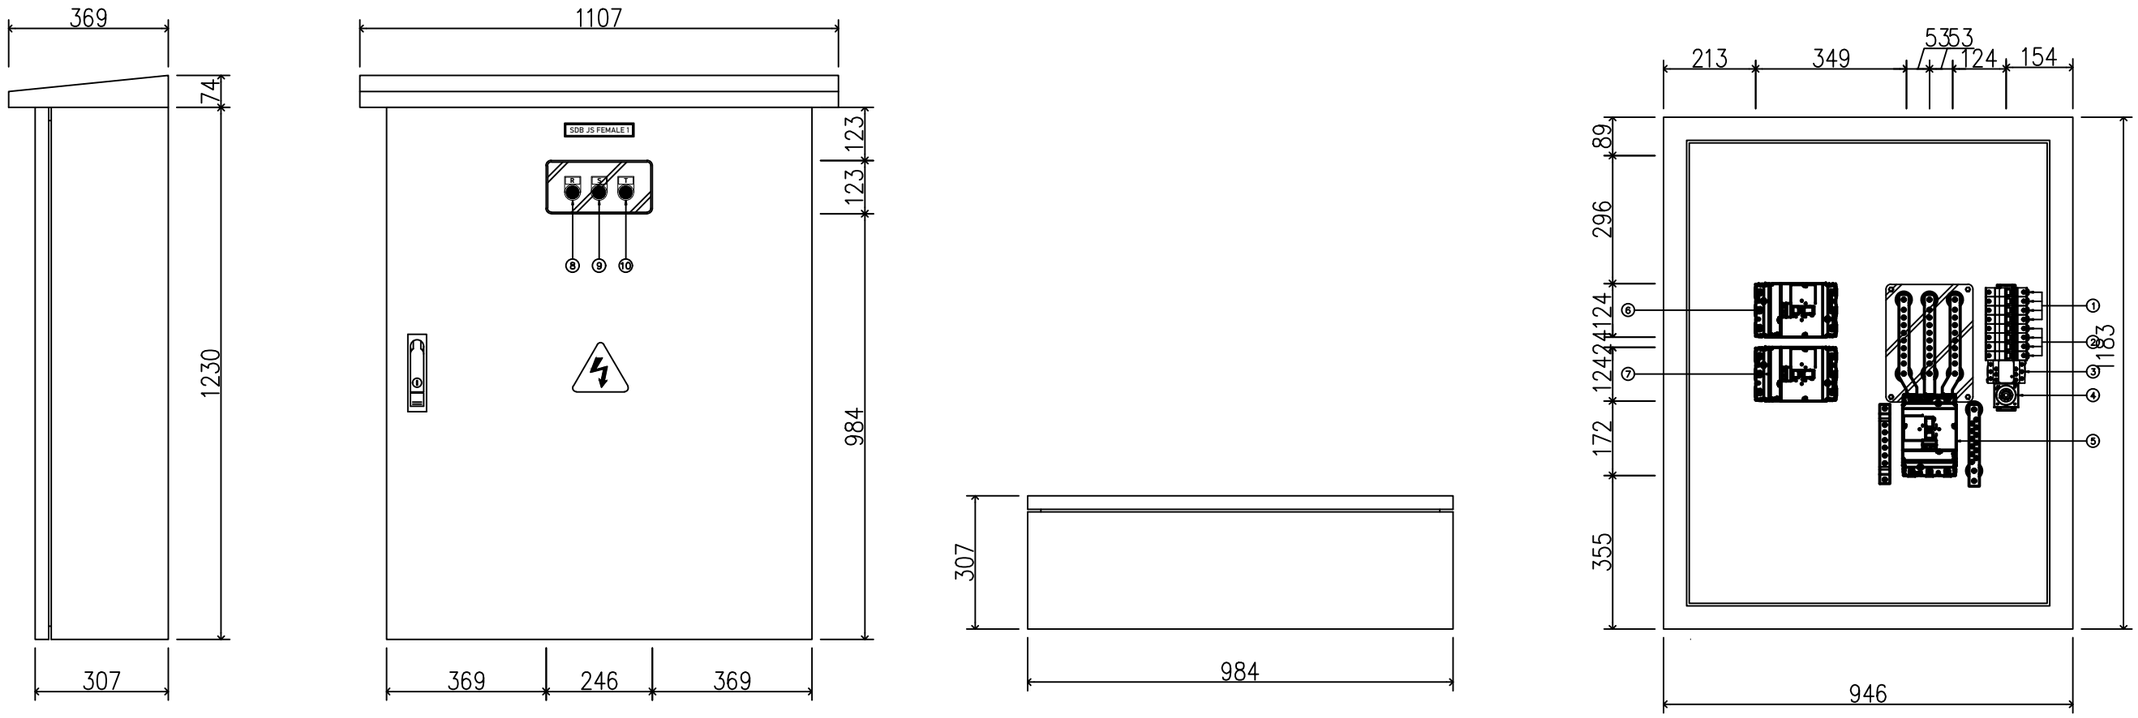

LIST OF MATERIALS PANEL

NO	COMPONENT	QTY	UNIT	TYPE	BRAND
1	MCB 1P, 32A / 6kA	4	pcs		
2	MCB 1P, 16A / 6kA	4	pcs		
3	CONTACTOR 3P	1	pcs		
4	TIMER	1	pcs		
5	MCCB 3P 250A 36kA	1	pcs		
6	MCCB 3P 63A 36kA	1	pcs		
7	MCCB 3P 160A 36kA	1	pcs		
8	PILOT LAMP "RED"	1	pcs		
9	PILOT LAMP "ORANGE"	1	pcs		
10	PILOT LAMP "GREEN"	1	pcs		
11	FUSE 4A + HOLDER	3	pcs		

NOTES :
QTY : 1 (ONE) UNIT
SERVICE : LOCAL JUNCTION BOX FOR FIELD INSTRUMENT CABLE TERMINATION
NOTE : THIS DRAWING IS ISSUED AS TYPICAL JB ARRANGEMENT. FINAL PANEL DESIGN SHALL FOLLOW PEP AND INSTRUMENT SPECIFICATION.

DRAWING REFERENCE	DESCRIPTION	REV	DATE	DESCRIPTION	PREPR'D	CHECK'D	APRV'D	CHECKED	APPROVED
		A	24/12/2025	ISSUED FOR REVIEW	RS	AS	RTN		

PT. PERTAMINA EP APPROVAL

PROCET :
JASA PEMBANGUNAN FASILITAS PRODUKSI STASIUN PENGUMPUL (SP) TANJUNG MIRING BARAT & KARANGAN TIMUR

OWNER : skkmigas PERTAMINA EP

CONTRACTOR : POG

SCALE : NTS

DRAWING NO. TMBP – SP001 – IN – DET – D102

SHEET. NO. 1 OF 1

REV A

DRAWING TITLE :
INSTRUMENT INSTALLATION DETAIL DRAWING FOR LOCAL PANEL